


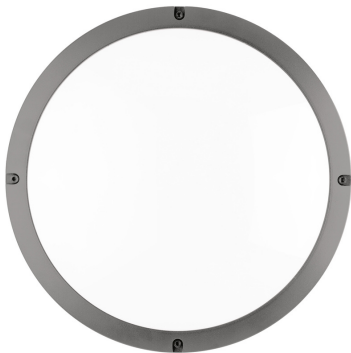

Features

- Led exterior bulkhead, Unique feature allowing a choice between High Output or High Efficiency with the flick of a switch, 759/1477LM, 9/17W, 84/87LM/W, 4000K, Driver Current: 350/750mA, CRI80, Non dimmable, IP65, IK10, lifespan 100,000hrs (L70:B50), (HxWxD) 350 x 350 x 128mm, 3.4kg, 3 step MacAdam ellipse, RAL 9006, Class 1, 230V


Product Overview

Product name	STERLING IP65 IK10 1477LM 840 SILVER
Technology	LED
Cap/Base	N/A
Environment	Indoor, Outdoor
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail
ETIM Class	EC002892
E-number FI	4579257
Fixture luminous flux (lm)	1477
Luminaire efficacy (lm/W)	87
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Photobiological Risk Group	RG1
Total power consumption (W)	17
Electrical protection	Class I
Dimmable	No
Housing colour	Silver
IP rating	IP65
IK rating	IK10

STERLING IP65 IK10 1477LM 840 SILVER 4063837

Product EAN number	5026524638371
Warranty	5 years
Dimming method	N/A

Photometry

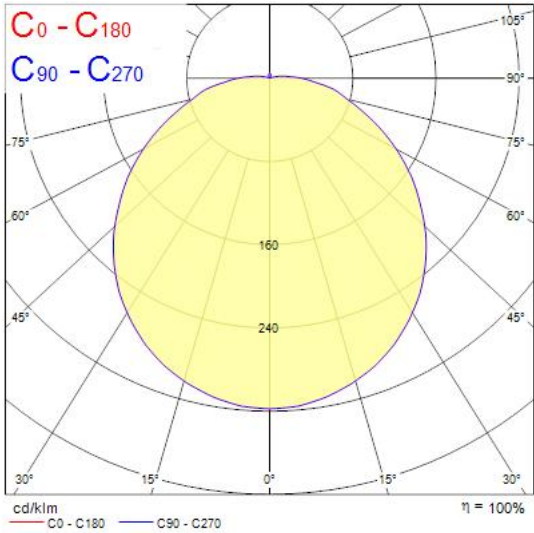

Technical drawings

