


START WATERPROOF 1200 HOUSING 1X
0047193

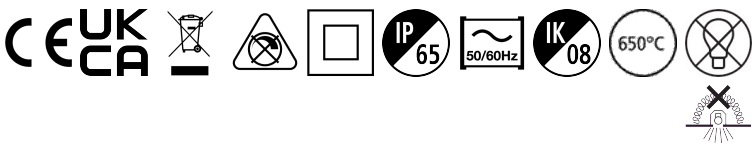

Features

- Luminaire, polycarbonate housing
- Single version, 1200mm
- Protection type IP65
- Luminous flux and light colour vary depending on LED tubes used
- To be used with T8 LED tubes
- Easy to install with stainless steel fixing brackets included for ceiling mounting
- Ideal for any industrial facilities, garages, car parks, workshops.


Product Overview

Product name	START WATERPROOF 1200 HOUSING 1X
Technology	LED
Cap/Base	2G13
Housing	PC Polycarbonate
Mount	Wall surface mounted
Light source included	Fixture without Lightsource
General application	Logistics & Industry
ETIM Class	EC002892
E-number FI	4357155
Fixture luminous flux (lm)	1
Luminaire efficacy (lm/W)	1
Light colour	N/A
Colour Variation Initial (SDCM)	N/A
Photobiological Risk Group	Not applicable
Total power consumption (W)	0.1
Electrical protection	Class II
Control gear type	Not required
Dimmable	No
Housing colour	Grey
IP rating	IP65

START WATERPROOF 1200 HOUSING 1X
0047193

IK rating	IK08
Product EAN number	5410288471938
Warranty	5 years
Dimming method	N/A

Technical drawings



Data table

GENERAL DATA	
Product name	START WATERPROOF 1200 HOUSING 1X
Technology	LED
Cap/Base	2G13
Housing	PC Polycarbonate
Mount	Wall surface mounted
General application	Logistics & Industry
Operating temperature range (°C)	-20°C...+40°C
ETIM Class	EC002892
E-number FI	4357155
Warranty	5 years
OPTICAL DATA	
Fixture luminous flux (lm)	1
Luminaire efficacy (lm/W)	1
Light colour	N/A
Colour Variation Initial (SDCM)	N/A
Distribution type	Symmetric

START WATERPROOF 1200 HOUSING 1X 0047193

Photobiological Risk Group	Not applicable
----------------------------	----------------

ELECTRICAL DATA

Light source included	Fixture without Lightsource
Total power consumption (W)	0.1
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
THD (at 230 V, 50 Hz, full load, at 100% dimming level) $\leq$ xx.x %	10
Electrical protection	Class II
Control gear required	No
Control gear type	Not required
Dimmable	No
Dimming method	N/A
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	1
Max. products per 16A C Breaker	1
Max. products per 16A B Breaker	1
Connectable conductor cross section - Max (mm ²)	1.5

LIFETIME DATA

Lifespan L70 B50	25000
------------------	-------

PHYSICAL DATA

Housing colour	Grey
IP rating	IP65
IK rating	IK08
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1280
Nominal Product Width (mm)	65
Nominal Product Height (mm)	60
Weight (kg)	0.7



START WATERPROOF 1200 HOUSING 1X
0047193

PACKAGING

Product EAN number	5410288471938
Packaging single length / height (cm)	133.5
Packaging single width (cm)	6.4
Packaging single depth (cm)	4.5
DUN14 (inner)	15410288471935
Units per outer package	12
Packaging outer length / height (cm)	135.0
Packaging outer width (cm)	15.9
Packaging outer depth (cm)	28.4

SAFETY DATA

Glow Wire Test (°C)	650
Optimal operating condition (°C)	-20-40
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No