

OTAO LINEAR CEILING ROSE WH 5-PIN
0041818



Features

- Ceiling rose incl 2m 5-pin power cable for OTAO on-off and DALI luminaires. RAL9003 (white) finishing.




Product Overview

Product name	OTAO LINEAR CEILING ROSE WH 5-PIN
Technology	LED (3 SDCM)
Housing	Steel
Mount	Suspended
General application	Office, Education
ETIM Class	EC002557
E-number FI	4170611
Colour Variation Initial (SDCM)	N/A
Photobiological Risk Group	Not applicable
Electrical protection	Class III
Housing colour	RAL9003
IP rating	OTHER
IK rating	IK03
Product EAN number	5410288418186
Warranty	5 years

OTAO LINEAR CEILING ROSE WH 5-PIN
0041818

Technical drawings

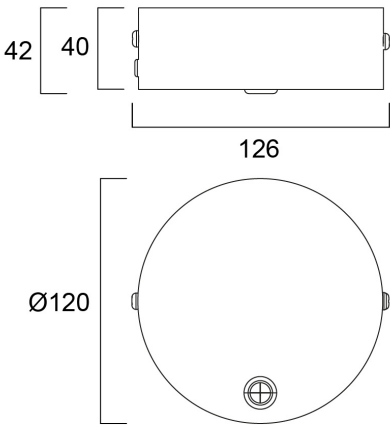

Data table

GENERAL DATA

Product name	OTAO LINEAR CEILING ROSE WH 5-PIN
Technology	LED (3 SDCM)
Type of accessory	Ceiling cup
Housing	Steel
Mount	Suspended
General application	Office, Education
Operating temperature range (°C)	5°C...+50°C
ETIM Class	EC002557
E-number FI	4170611
Warranty	5 years

OPTICAL DATA

Colour Variation Initial (SDCM)	N/A
Photobiological Risk Group	Not applicable

OTAO LINEAR CEILING ROSE WH 5-PIN 0041818

ELECTRICAL DATA

Electrical protection	Class III
Control gear required	No

PHYSICAL DATA

Housing colour	RAL9003
IP rating	OTHER
IK rating	IK03
Diffuser finish	Other
Nominal Product Diameter (mm)	120
Weight (kg)	0.3

PACKAGING

Product EAN number	5410288418186
Packaging single length / height (cm)	13.9
Packaging single width (cm)	12.3
Packaging single depth (cm)	8.8
DUN14 (inner)	15410288418183
Units per outer package	20
Packaging outer length / height (cm)	64.3
Packaging outer width (cm)	29.7
Packaging outer depth (cm)	19.4

SAFETY DATA

Glow Wire Test (°C)	650
Optimal operating condition (°C)	5-50
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No