


Features

- LED Panel with backlit technology, ideal for general indoor lighting applications such as breakout areas, offices and meeting rooms. Low glaring UGR<22. RG0, 110 degree beam angle , optical system: PS diffuser with Opal finish. Tp(b) rated diffuser that may not burn at a speed of more than 50mm per minute. Light color temperature: 4000K Neutral White, total system power: 29W , total fixture output: 3200lm, efficacy: 110lm/W, Ra80 typical, LED chromacity: 5 step MacAdam ellipse (SDCM5), lifespan: 100,000 hours at 70% of the original output (L70B50), IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, low flicker, non dimmable driver, electrical protection: Class II. Degree of Protection: IP40/IP20, suitable for indoor environment only. Nominal size: 595x595x31mm, Loop in / loop out wiring, saftey cables & quick connector included, 31mm nominal height, White color frame, weight: 1,52kg.

Product Overview

Cap/Base	N/A
Control gear type	LED driver constant current

Photometry

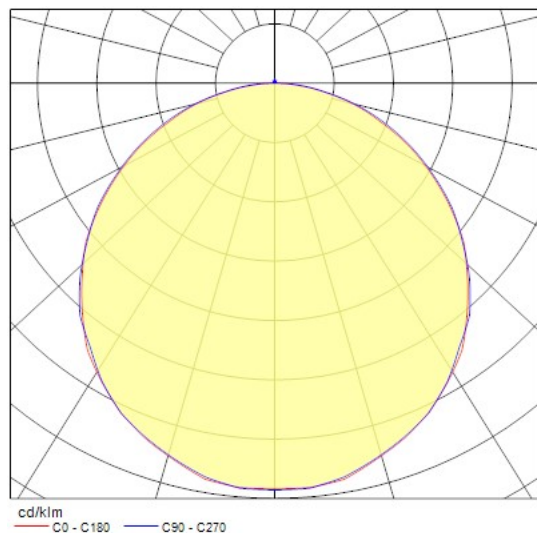

Technical drawings

