

RTS 1500MM 70W 5-WIRE LEFT ASYM WHITE
0042586



Features

- RTS LED linear luminaire for industrial and commercial applications. 1500 mm lenght with asymmetrical (Left) optics provide homogenous light distribution for wide, shelf areas. Steel housing, White color, -25 ... +30 °C operating temperature range, 4000 K, CRI 80, 3 SDMC. 70 W power consumption, 11200 lm luminous flux, 160 lm/W efficacy, 1500 mm x 70.2 mm x 78.6 mm (L x W x H) dimensions, IP20, IK03, 220-240 V 50/60 Hz, Class I. Lifespan L70:B50 120,000 hours.


Product Overview

Product name	RTS 1500MM 70W 5-WIRE LEFT ASYM WHITE
Technology	LED
Cap/Base	N/A
Housing	Steel
General application	Logistics & Industry
ETIM Class	EC000986
Fixture luminous flux (lm)	11200
Luminaire efficacy (lm/W)	160
Correlated colour temperature (k)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Photobiological Risk Group	RG1
Total power consumption (W)	70
Electrical protection	Class I
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP20
IK rating	IK03
Product EAN number	5410288425863
Warranty	5 years


RTS 1500MM 70W 5-WIRE LEFT ASYM WHITE
0042586

Dimming method	N/A
----------------	-----

Photometry

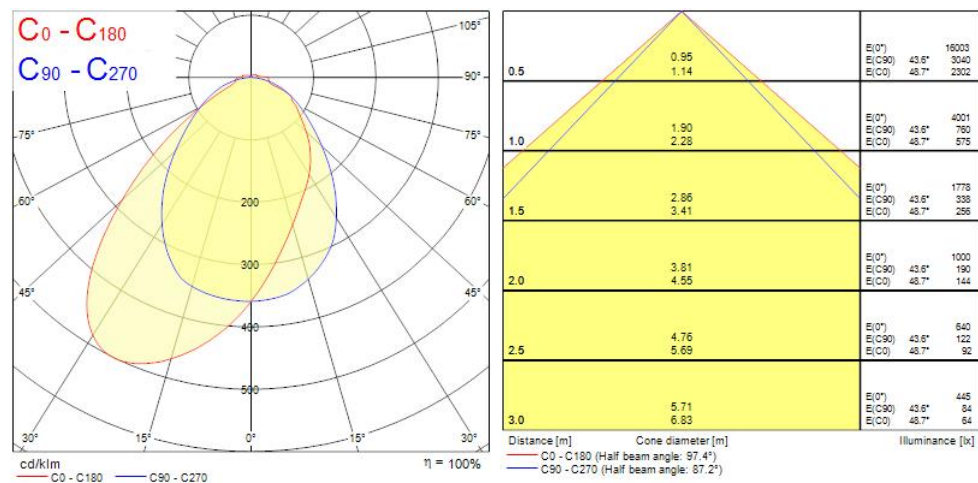

Technical drawings

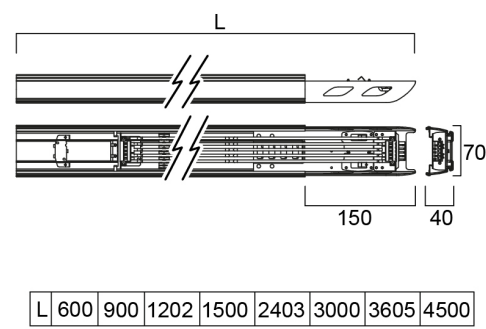

Data table

GENERAL DATA

RTS 1500MM 70W 5-WIRE LEFT ASYM WHITE 0042586

Product name	RTS 1500MM 70W 5-WIRE LEFT ASYM WHITE
Technology	LED
Cap/Base	N/A
Housing	Steel
General application	Logistics & Industry
Operating temperature range (°C)	-25°C...+30°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC000986
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	11200
Luminaire efficacy (lm/W)	160
Correlated colour temperature (k)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Distribution type	Asymmetric
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	70
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
Electrical protection	Class I
Control gear required	No
Dimmable	No
Dimming method	N/A
Drive current (mA)	1000
Inrush Current (A)	20
Inrush Duration (µs)	250
Energy Efficiency Class (A->G) of contained light source	C



RTS 1500MM 70W 5-WIRE LEFT ASYM WHITE
0042586

Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 16A C Breaker	19
Max. products per 16A B Breaker	13

LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	75000

PHYSICAL DATA

Housing colour	White
IP rating	IP20
IK rating	IK03
Diffuser finish	Transparent
Diffuser material	PMMA Acrylic
Nominal Product Length (mm)	1500
Nominal Product Width (mm)	70.2
Nominal Product Height (mm)	78.6
Weight (kg)	1.7

PACKAGING

Product EAN number	5410288425863
Packaging single length / height (cm)	150.0
Packaging single width (cm)	7.5
Packaging single depth (cm)	6.5
DUN14 (inner)	15410288425860
Units per outer package	10
Packaging outer length / height (cm)	157.0
Packaging outer width (cm)	44.0
Packaging outer depth (cm)	21.0

SAFETY DATA

Glow Wire Test (°C)	650
---------------------	-----



RTS 1500MM 70W 5-WIRE LEFT ASYM WHITE
0042586

Optimal operating condition (°C)	-25-30
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No