



Features

• Ceiling Recessed LED Linear luminaire (lay-in), with Louvre + MPO diffuser, Direct Light Distribution, Luminaire Dimensions: 595x595x52mm, Sylvania White body colour, IP20, IK07, SylSmart Standalone capable, Emergency 3 hours, Low LED flicker (+/-5%), Warm White (3000K), LED Colour Temperature, 3350lm, 33W, 101lm/W, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, UGR<15, Luminance at 65° < 3000 cd/m2, Lifespan: 96,000 hours L80B20, Glow Wire Test 850°C, Quick and easy electrical connection with direct access to push-connectors on top, 2 x metallic safety cables (1.5m) included, the luminaire can be covered with building insulation of Glass Wool type.



Product Overview

Product name	RANA NEO 3300LM REC 600x600 830 SSC EM 2L WHITE
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
General application	Education, Office
ETIM Class	EC002892
Fixture luminous flux (lm)	3350
Luminaire efficacy (lm/W)	101
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 15

RANA NEO 3300LM REC 600x600 830 SSC EM 2L WHITE 0052586

Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	80
Total power consumption (W)	33
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9016
IP rating	IP20
IK rating	IK07
Product EAN number	5410288525860
Warranty	5 years
Dimming method	SylSmart SSC

Photometry

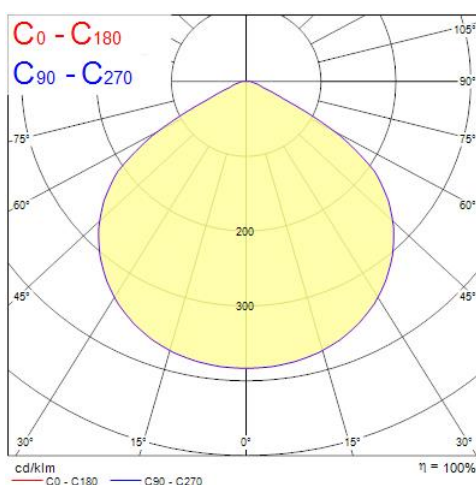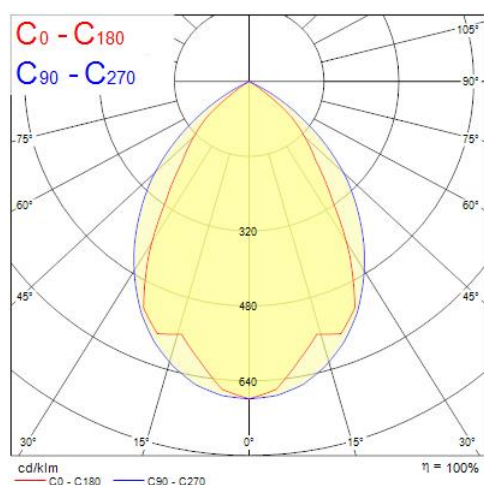


Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)	Illuminance [lx]
0.5	0.89 0.67	41.6°	33.7°	33.7°	9093
1.0	1.78 1.33	41.6°	33.7°	33.7°	2273
1.5	2.66 2.00	41.6°	33.7°	33.7°	1010
2.0	3.55 2.67	41.6°	33.7°	33.7°	508
2.5	4.44 3.33	41.6°	33.7°	33.7°	364
3.0	5.33 4.00	41.6°	33.7°	33.7°	283

Distance [m] Cone diameter [m]
 C0 - C180 (Half beam angle: 67.4°)
 C90 - C270 (Half beam angle: 83.2°)

RANA NEO 3300LM REC 600x600 830 SSC EM 2L WHITE
0052586



Technical drawings

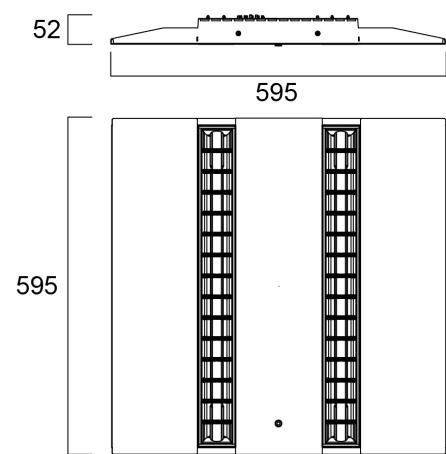

Data table

GENERAL DATA

Product name	RANA NEO 3300LM REC 600x600 830 SSC EM 2L WHITE
Technology	LED (3 SDCM)
Cap/Base	N/A

RANA NEO 3300LM REC 600x600 830 SSC EM 2L WHITE 0052586

Housing	Steel
Mount	Ceiling recessed mounting
General application	Education, Office
Operating temperature range (°C)	-5°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	3350
Luminaire efficacy (lm/W)	101
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 15
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	80
Emergency duration (h)	3

ELECTRICAL DATA

Total power consumption (W)	33
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart SSC
Drive current (mA)	600

RANA NEO 3300LM REC 600x600 830 SSC EM 2L WHITE 0052586

Inrush Current (A)	20
Inrush Duration (µs)	25
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	57
Max. products per 13A C Breaker	71
Max. products per 16A C Breaker	93
Max. products per 20A C Breaker	114
Max. products per 10A B Breaker	35
Max. products per 13A B Breaker	45
Max. products per 16A B Breaker	55
Max. products per 20A B Breaker	68

LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	96000

PHYSICAL DATA

Housing colour	RAL9016
IP rating	IP20
IK rating	IK07
Diffuser finish	Matt/satinized
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	595
Nominal Product Width (mm)	595
Nominal Product Height (mm)	52
Weight (kg)	4.5

PACKAGING

Product EAN number	5410288525860
Packaging single length / height (cm)	62.0
Packaging single width (cm)	6.5



RANA NEO 3300LM REC 600x600 830 SSC EM 2L WHITE
0052586

Packaging single depth (cm)	65.0
DUN14 (inner)	05410288525860
Units per outer package	1
Packaging outer length / height (cm)	62.0
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	65.0

SAFETY DATA

Glow Wire Test (°C)	850
Optimal operating condition (°C)	-5-25
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No