



Features

• DELTAWING 1200 4K is a ceiling and wall surface, suspended LED luminaire with opal diffuser, 1160x160x60mm dimensions, 35W system power, 4,600lm flux and 131lm/W efficacy, CRi (Ra) >80, 4000K (Neutral White) CCT, chromaticity tolerance of 3-step MacAdam ellipse, non-dimmable (4-steps DIP switch) driver (20W 2700lm, 25W 3350lm, 30W 4000lm, 35W 4600lm), RAL9003 finishing, L70B50 100khrs / L80B50 80khrs lifespan, IK06 impact resistance, IP44 ingress protection rating (in ceiling surface installation), Electrical protection Class I, Glow wire test 850°C.


Product Overview

Product name	DELTAWING 1200 4K
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	PC Polycarbonate, Steel
Mount	Ceiling surface mounting, Wall surface mounted
General application	Education, Logistics & Industry, Office
ETIM Class	EC002892
E-number FI	4279327
Fixture luminous flux (lm)	4600
Luminaire efficacy (lm/W)	131
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	120
Photobiological Risk Group	RG0
Total power consumption (W)	35


DELTAWING 1200 4K 0042930

Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Housing colour	RAL9003
IP rating	IP44
IK rating	IK06
Product EAN number	5410288429304
Warranty	5 years
Dimming method	N/A


Photometry

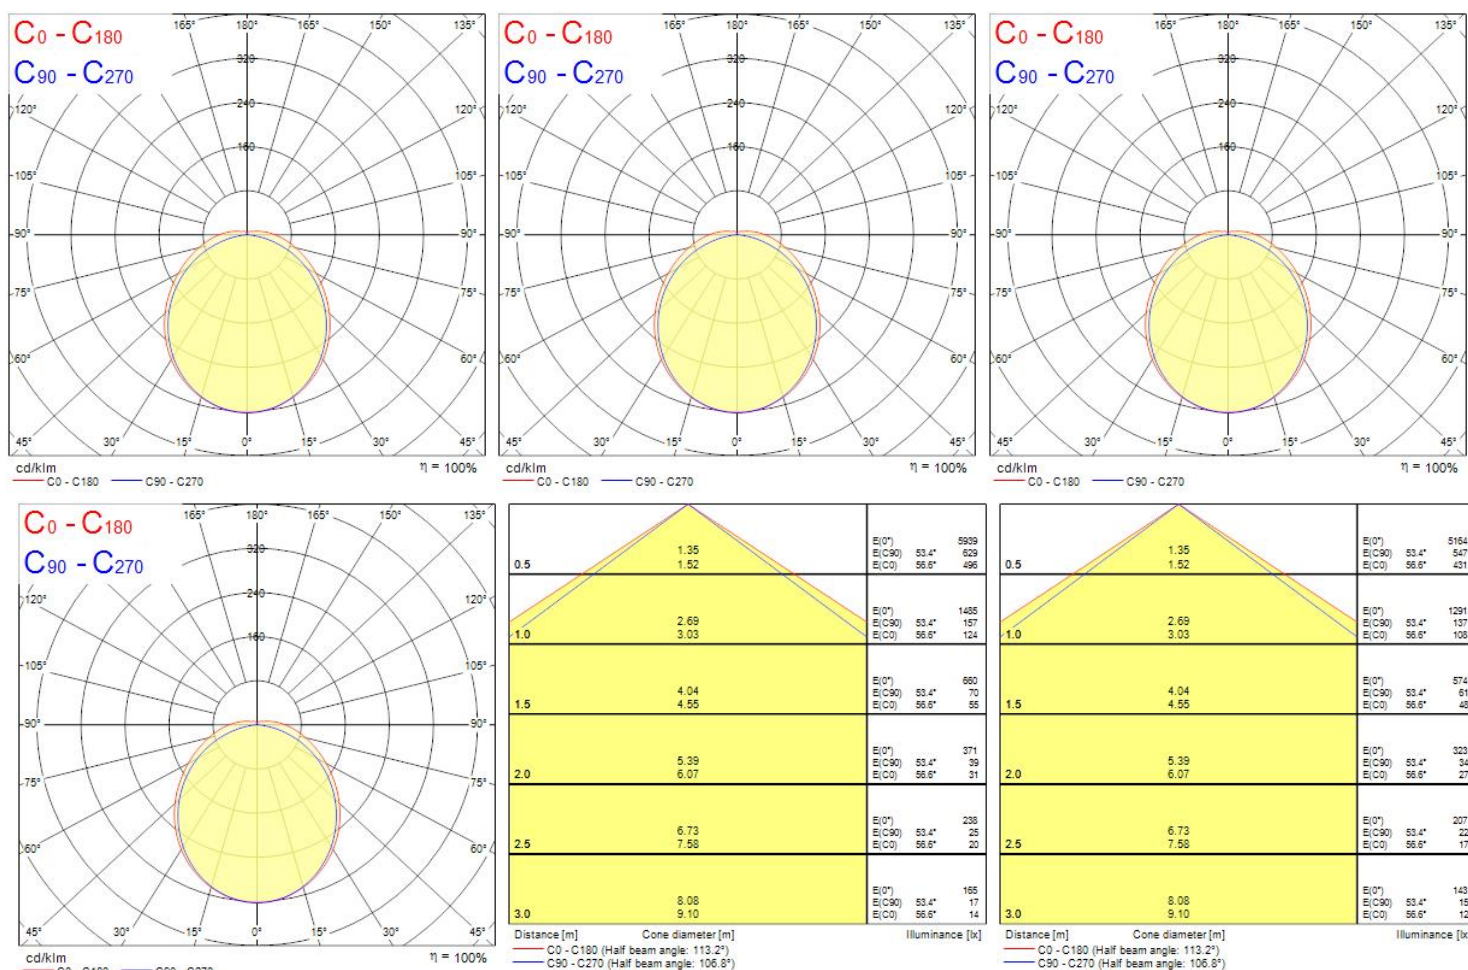

DELTAWING 1200 4K
0042930

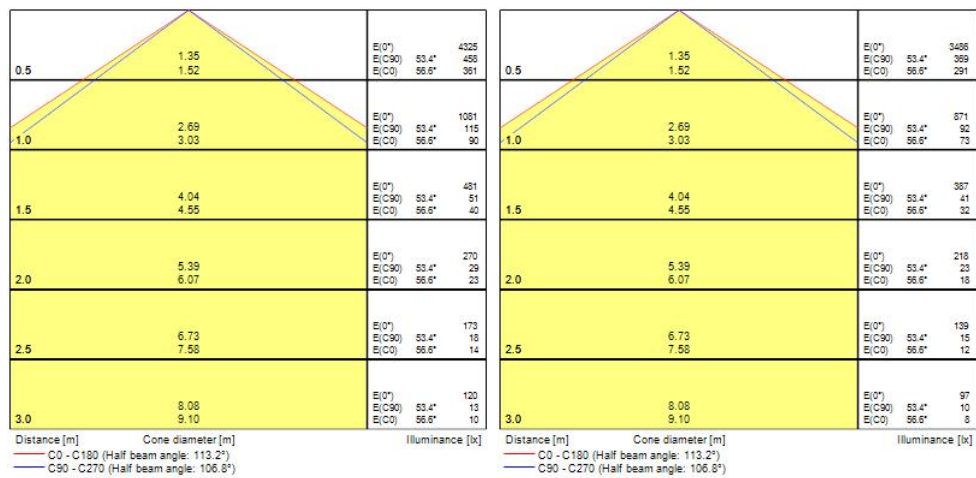

Technical drawings

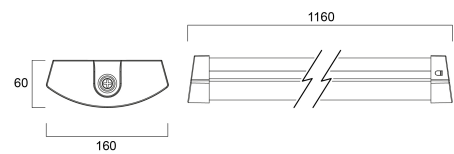

Data table

GENERAL DATA

Product name	DELTAWING 1200 4K
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	PC Polycarbonate, Steel
Mount	Ceiling surface mounting, Wall surface mounted
General application	Education, Logistics & Industry, Office
Operating temperature range (°C)	-20°C...+40°C
ETIM Class	EC002892
E-number FI	4279327
Warranty	5 years

DELTAWING 1200 4K 0042930

OPTICAL DATA

Fixture luminous flux (lm)	4600
Luminaire efficacy (lm/W)	131
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	120
Distribution type	Symmetric
Photobiological Risk Group	RG0

ELECTRICAL DATA

Total power consumption (W)	35
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	350
Inrush Current (A)	30
Inrush Duration (µs)	190
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	22
Max. products per 16A C Breaker	35
Max. products per 16A B Breaker	35

DELTAWING 1200 4K 0042930

Connectable conductor cross section - Max (mm²)	1.5
---	-----

LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	80000

PHYSICAL DATA

Housing colour	RAL9003
IP rating	IP44
IK rating	IK06
Diffuser finish	Diffuse
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1160
Nominal Product Width (mm)	160
Nominal Product Height (mm)	60
Weight (kg)	1.965

PACKAGING

Product EAN number	5410288429304
Packaging single length / height (cm)	124.6
Packaging single width (cm)	16.5
Packaging single depth (cm)	6.6
DUN14 (inner)	15410288429301
Units per outer package	4
Packaging outer length / height (cm)	126.0
Packaging outer width (cm)	34.5
Packaging outer depth (cm)	15.2

SAFETY DATA

Glow Wire Test (°C)	850
Optimal operating condition (°C)	-20-40
Special purpose lamp	No



DELTAWING 1200 4K
0042930

Dry applications use only	No
Suitable for household illumination	No