

Concord

Solstice 200 2400lm 940 SSA01D
2070159



Features

- The Solstice 200 2400lm 940 SSA01D is a high efficientSSA01D dimmable downlight luminaire, Colour rendering index Ra>90, Colour temperature: 4000K Neutral White, Class II, Protection rating IP40/IP20, Cut out dimensions: 200mm. It can be used with external sensors: 9041523 or 9041524.

Product Overview


Product name	Solstice 200 2400lm 940 SSA01D
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4262086
Fixture luminous flux (lm)	2400
Luminous flux (lm)	2400
Luminaire efficacy (lm/W)	141
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Beam Angle (°)	70
Glare control	< 19

Concord

Solstice 200 2400lm 940 SSA01D 2070159

Photobiological Risk Group	RG0
Total power consumption (W)	17
Electrical protection	Class II
Control gear type	LED driver constant current
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9016
IP rating	IP40/20
IK rating	IK02
Product EAN number	5025768701599
Warranty	5 years
Dimming method	SylSmart SSA
Useful luminous flux (#use)	2400

Photometry

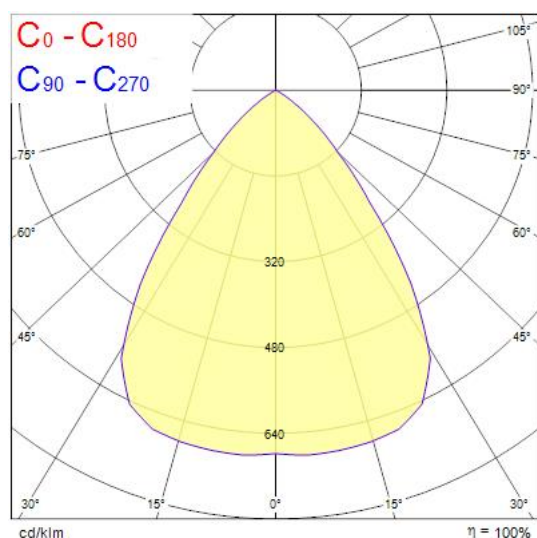

Technical drawings

