



Features

- Sensor Dim LED exterior surface mounted luminaire, 1100lm, 12W power consumption, 92lm/W efficacy, 4000K color temperature, CRI80, IP66, IK10, 50,000 hours (L70), white housing, vandal resistant, supplied with anti-theft screws


Product Overview

Product name	START SURFACE IP66 1100LM 840 IK10 MW SENS WHT
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Environment	Indoor, Outdoor
General application	Hospitality
ETIM Class	EC002892
E-number FI	4274705
E-number SE	7505135
Fixture luminous flux (lm)	1100
Luminaire efficacy (lm/W)	92
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Beam Angle (°)	120
Beam Angle (°)	110
Photobiological Risk Group	RG0
Total power consumption (W)	12
Electrical protection	Class II

START SURFACE IP66 1100LM 840 IK10 MW SENS WHT
0049291


Dimmable	Yes
LED Flickering Rate	High (>40%)
Housing colour	RAL9003
IP rating	IP66
IK rating	IK10
Product EAN number	5410288492919
Warranty	5 years
Dimming method	Other
Colour Code	840

Photometry

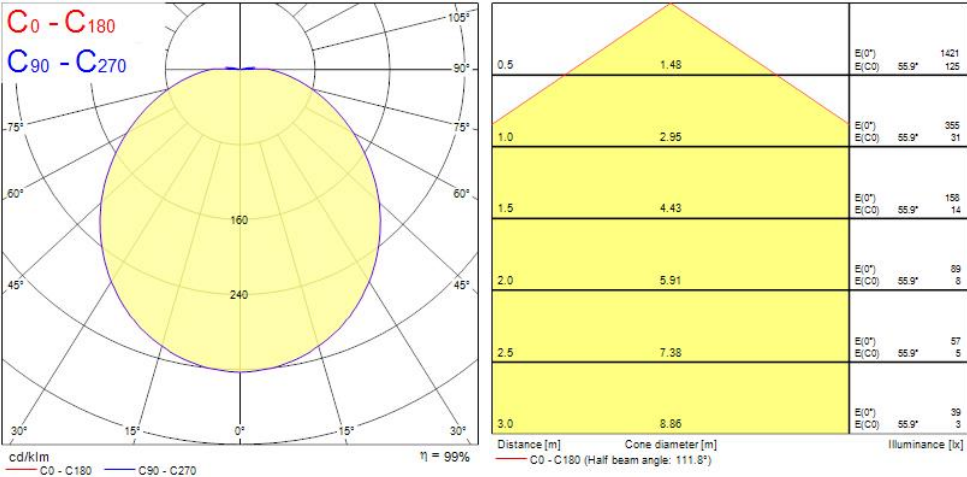

START SURFACE IP66 1100LM 840 IK10 MW SENS WHT
0049291

Technical drawings

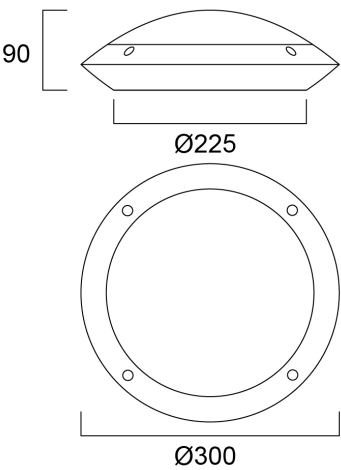

Data table

GENERAL DATA

Product name	START SURFACE IP66 1100LM 840 IK10 MW SENS WHT
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Environment	Indoor, Outdoor
General application	Hospitality
Operating temperature range (°C)	-20°C...+45°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4274705
E-number SE	7505135
Warranty	5 years

OPTICAL DATA

START SURFACE IP66 1100LM 840 IK10 MW SENS WHT 0049291

Fixture luminous flux (lm)	1100
Luminaire efficacy (lm/W)	92
Correlated colour temperature (k)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Beam Angle (°)	120
Beam Angle (°)	110
Photobiological Risk Group	RG0

ELECTRICAL DATA

Total power consumption (W)	12
Primary Supply/Product voltage - min (V)	230
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.9
Electrical protection	Class II
Control gear required	No
Dimmable	Yes
Dimming method	Other
Drive current (mA)	350
Inrush Current (A)	5.6
Inrush Duration (µs)	124
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	High (>40%)
Max. products per 10A C Breaker	80
Max. products per 13A C Breaker	105
Max. products per 16A C Breaker	150
Max. products per 20A C Breaker	200
Max. products per 10A B Breaker	60
Max. products per 13A B Breaker	78
Max. products per 16A B Breaker	96
Max. products per 20A B Breaker	120



START SURFACE IP66 1100LM 840 IK10 MW SENS WHT
0049291

LIFETIME DATA

Lifespan L70 B50	50000
------------------	-------

PHYSICAL DATA

Housing colour	RAL9003
IP rating	IP66
IK rating	IK10
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Height (mm)	90
Nominal Product Diameter (mm)	300
Weight (kg)	0.78

PACKAGING

Product EAN number	5410288492919
Packaging single length / height (cm)	30.2
Packaging single width (cm)	9.9
Packaging single depth (cm)	30.5
DUN14 (inner)	15410288492916
Units per outer package	6
Packaging outer length / height (cm)	61.5
Packaging outer width (cm)	31.0
Packaging outer depth (cm)	32.0

SAFETY DATA

Glow Wire Test (°C)	650
Optimal operating condition (°C)	-20-45
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No