

Concord

Solstice 150 1850lm 940 SSC01D WW
2070395



Features

- The Solstice 150 1850lm 940 SSC WW is a high efficient SSC WW dimmable downlight luminaire, Colour rendering index Ra>90, Colour temperature: 4000K Neutral White, Class II, Protection rating IP40/IP20, Cut out dimensions: 150mm.

Product Overview


Product name	Solstice 150 1850lm 940 SSC01D WW
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4262070
Fixture luminous flux (lm)	1850
Luminous flux (lm)	1850
Luminaire efficacy (lm/W)	123
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Warm White
CRI (Ra)	90
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Beam Angle (°)	70
Glare control	< 24

Concord

Solstice 150 1850lm 940 SSC01D WW
2070395

Photobiological Risk Group	RG0
Total power consumption (W)	15
Electrical protection	Class II
Control gear type	LED driver constant current
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9016
IP rating	IP40/20
IK rating	IK02
Product EAN number	5025768703951
Warranty	5 years
Dimming method	SylSmart SSC
Useful luminous flux (#use)	1850

Photometry

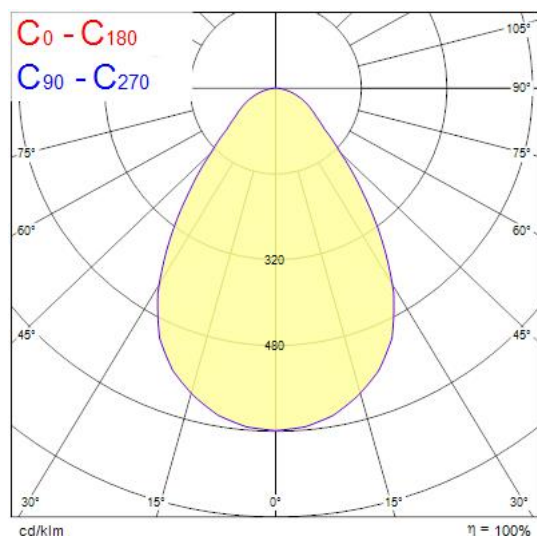

Technical drawings

