


Insaver UGR19 IP44 205 2500 840 SSA01D
0030489

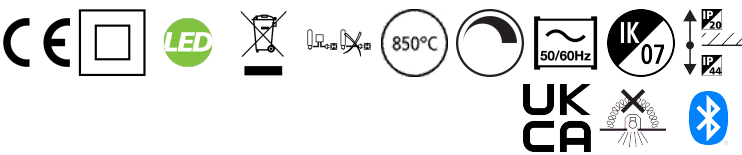

Features

- Insaver is a ceiling recessed LED downlight (IP44 from the front), Die-cast aluminium body, loop in loop out connector for quick installation, SylSmart Connected SSA01D, 20W; 2500lm; 125lm/W; 4000K; UGR <19 with shallow product depth 60mm. Meets TP(a) requirements.


Product Overview

Product name	Insaver UGR19 IP44 205 2500 840 SSA01D
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
Fixture luminous flux (lm)	2500
Luminaire efficacy (lm/W)	125
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Beam Angle (°)	70
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	20
Electrical protection	Class II
Control gear type	LED driver constant current

Insaver UGR19 IP44 205 2500 840 SSA01D
0030489

Control gear mounting	Remote
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9010
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288304892
Warranty	5 years
Dimming method	SylSmart SSA
Useful luminous flux (#use)	2500

Photometry

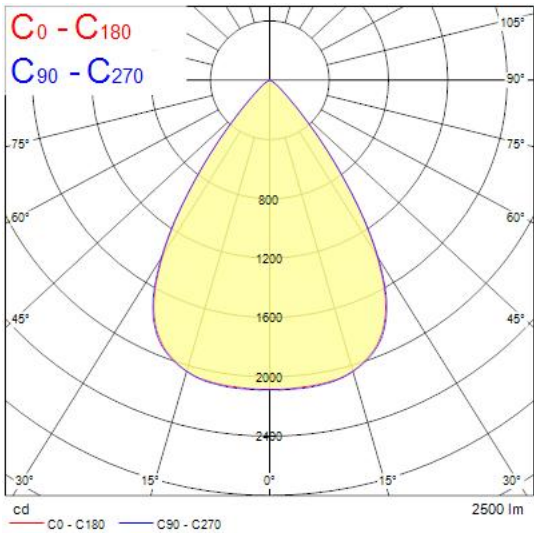

Technical drawings

