


Start Flood Flat IP65 10000LM 840 Black
0050126

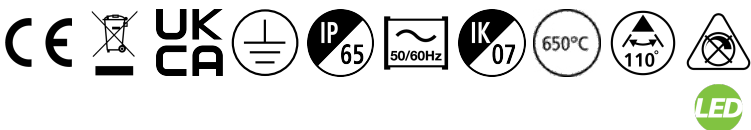

Features

• The streamlined, durable, lightweight die-cast aluminium body makes Start Flood Flat a perfect choice for building facades, car parks, garages and construction areas. The product includes 1 m pre-wired stripped cable and fitting bracket for quick and easy installation and the universal mounting bracket allows wall or surface mounting with the possibility of vertical tilting. Black (RAL9017) housing, white reflector, 10000 lm, 73 W, 137 lm/W, 4000K, non dimmable, CRI>80, IP65, IK07, Class I, lifespan L70:B50: 90000 hrs, 195 x 250 x 33 mm (L x W x H). Weight: 1.19kg.


Product Overview

Product name	Start Flood Flat IP65 10000LM 840 Black
Technology	LED
Cap/Base	N/A
General application	Residential & Consumer
ETIM Class	EC001744
E-number FI	4579537
Fixture luminous flux (lm)	10000
Luminaire efficacy (lm/W)	137
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Beam Angle (°)	110
Photobiological Risk Group	RG1
Total power consumption (W)	73
Electrical protection	Class I
LED Flickering Rate	Low (6% - 20%)
Housing colour	Black

Start Flood Flat IP65 10000LM 840 Black
0050126

IP rating	IP65
IK rating	IK07
Product EAN number	5410288501260
Warranty	3 years
Dimming method	N/A
Useful luminous flux (#use)	10000

Photometry

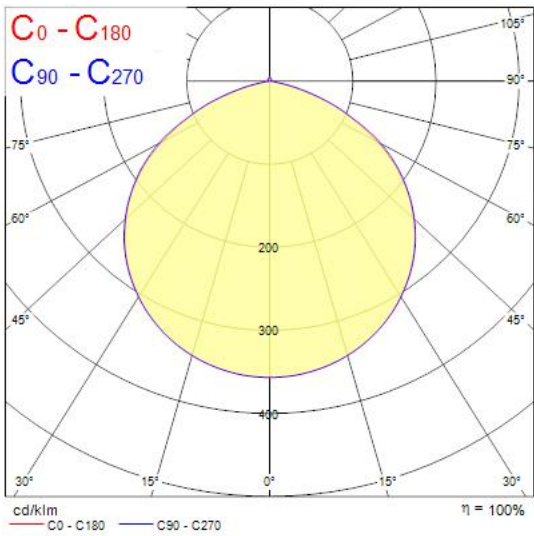

Technical drawings

