


INTERRATA XS IP67 CLEAR 100LM 830 NB  
0049038



Features

- Round shaped in-ground luminaire with fixed light module, walk-over for pressure loads to 500kg (5kN), comes with 2m 3x1mm<sup>2</sup> flying lead and recessing tube, aluminium housing with Stainless steel (SS316) decorative ring and clear glass diffuser, IP67, IK10, Class I, non-dimmable, 125lm, 2.7W, 46lm/W, CRI80, 12° beam angle, 50000 hrs L70 B50 lumen maintenance, 100mm diameter, 129mm recessing tube height, 0.42kg weight.


Product Overview

|                                   |                                                                  |
|-----------------------------------|------------------------------------------------------------------|
| Product name                      | INTERRATA XS IP67 CLEAR 100LM 830 NB                             |
| Technology                        | LED                                                              |
| Cap/Base                          | N/A                                                              |
| Housing                           | Aluminium                                                        |
| Mount                             | Ground recessed                                                  |
| General application               | Hospitality, Museums & Galleries, Office, Residential & Consumer |
| ETIM Class                        | EC000758                                                         |
| E-number FI                       | 4579501                                                          |
| Fixture luminous flux (lm)        | 125                                                              |
| Luminaire efficacy (lm/W)         | 46                                                               |
| Correlated colour temperature (k) | 3000                                                             |
| Light colour                      | Warm White                                                       |
| CRI (Ra)                          | 80                                                               |
| Colour Variation Initial (SDCM)   | 5                                                                |
| Beam Angle (°)                    | 12                                                               |
| Photobiological Risk Group        | RG0                                                              |
| Total power consumption (W)       | 2.7                                                              |
| Electrical protection             | Class I                                                          |
| LED Flickering Rate               | Low (6% - 20%)                                                   |
| Housing colour                    | Stainless steel                                                  |

**INTERRATA XS IP67 CLEAR 100LM 830 NB  
0049038**

|                             |               |
|-----------------------------|---------------|
| IP rating                   | IP67          |
| IK rating                   | IK10          |
| Product EAN number          | 5410288490380 |
| Warranty                    | 5 years       |
| Colour Code                 | 830           |
| Useful luminous flux (#use) | 125           |

## Photometry

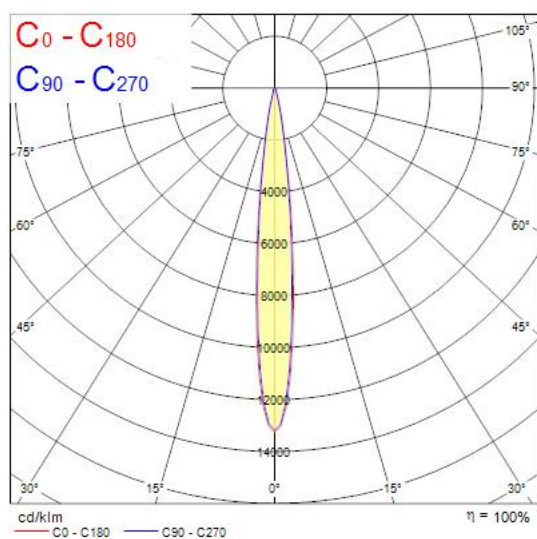

## Technical drawings

