

START Downlight 225 IP54 2400Lm 840 DALI
0030339



Features

• Ceiling recessed LED downlight IP54 (from the front), with only 65mm product depth and 225mm cutout. Supplied with DALI Tridonic push dim driver with loop in - out option (2800671). Ideal replacement for 2x26W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Die-cast aluminium body, 23W, 4000K, Driver Current: 650mA, CRI80, 74° beam angle, IP54 from the front, IK07, (HxW) 65x225mm, Class 2, 220-240V. Meets TP(a) requirements.


Product Overview

Product name	START Downlight 225 IP54 2400Lm 840 DALI
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Logistics & Industry, Office
ETIM Class	EC001744
E-number FI	4278169
Fixture luminous flux (lm)	2400
Luminaire efficacy (lm/W)	104
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	74
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	23
Electrical protection	Class II
Control gear type	LED driver constant current

START Downlight 225 IP54 2400Lm 840 DALI
0030339

Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9010
IP rating	IP54/20
IK rating	IK07
Product EAN number	5410288303390
Warranty	5 years
Dimming method	DALI, DALI-2, Switch-dim (mains-rated)

Photometry

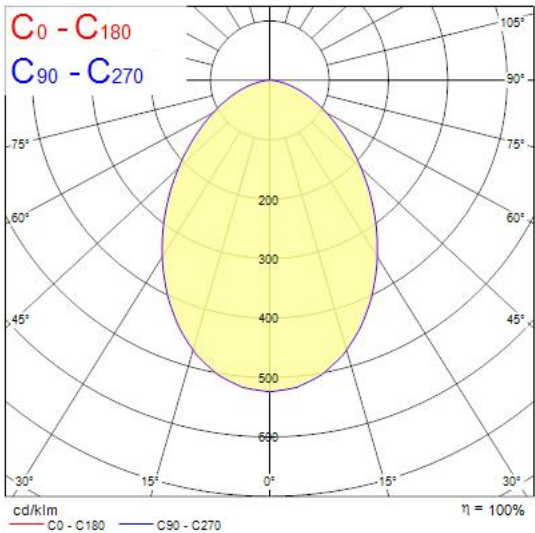

Technical drawings

