

Features

• DELTAWING 1500 3K DALI EM is a ceiling and wall surface, suspended LED luminaire with opal diffuser, 1440x160x60mm dimensions, 58W system power, 6,850lm flux and 118lm/W efficacy, CRI (Ra) >80, 3000K (Warm White) CCT, chromaticity tolerance of 3-step MacAdam ellipse, DALI dimmable driver and 3hrs emergency with LiFePO4 battery, RAL9003 finishing, L70B50 100khrs / L80B50 80khrs lifespan, IK06 impact resistance, IP44 ingress protection rating (in ceiling surface installation), Electrical protection Class I, Glow wire test 850°C.


Product Overview

Product name	DELTAWING 1500 3K DALI EM
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	PC Polycarbonate, Steel
Mount	Ceiling surface mounting, Wall surface mounted
General application	Education, Logistics & Industry, Office
ETIM Class	EC002892
Fixture luminous flux (lm)	6850
Luminaire efficacy (lm/W)	118
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	120
Photobiological Risk Group	RG0
Total power consumption (W)	58
Electrical protection	Class I
Control gear type	LED driver constant current

DELTAWING 1500 3K DALI EM
0042923

Dimmable	Yes
Housing colour	RAL9003
IP rating	IP44
IK rating	IK06
Product EAN number	5410288429236
Warranty	5 years
Dimming method	DALI

Photometry

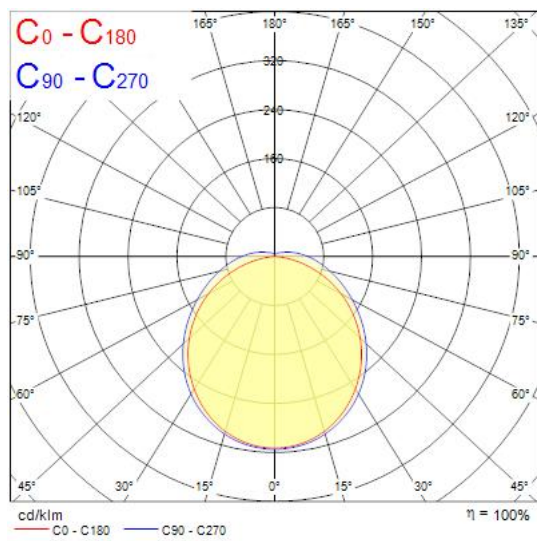

Technical drawings

