

Features

• DELTAWING 1200 3K DALI EM is a ceiling and wall surface, suspended LED luminaire with opal diffuser, 1160x160x60mm dimensions, 38W system power, 4,200lm flux and 111lm/W efficacy, CRI (Ra) >80, 3000K (Warm White) CCT, chromaticity tolerance of 3-step MacAdam ellipse, DALI dimmable driver and 3hrs emergency with LiFePO4 battery, RAL9003 finishing, L70B50 100khrs / L80B50 80khrs lifespan, IK06 impact resistance, IP44 ingress protection rating (in ceiling surface installation), Electrical protection Class I, Glow wire test 850°C.


Product Overview

Product name	DELTAWING 1200 3K DALI EM
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	PC Polycarbonate, Steel
Mount	Ceiling surface mounting, Wall surface mounted
General application	Education, Logistics & Industry, Office
ETIM Class	EC002892
Fixture luminous flux (lm)	4200
Luminaire efficacy (lm/W)	111
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	120
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	315
Total power consumption (W)	38
Electrical protection	Class I

DELTAWING 1200 3K DALI EM
0042921

Control gear type	LED driver constant current
Dimmable	Yes
Housing colour	RAL9003
IP rating	IP44
IK rating	IK06
Product EAN number	5410288429212
Warranty	5 years
Dimming method	DALI

Photometry

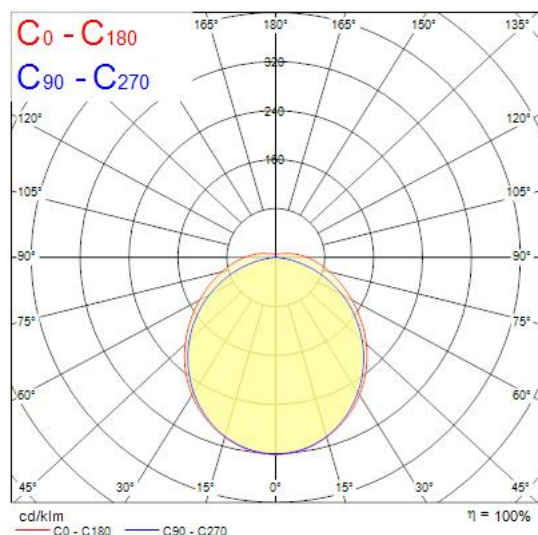

Technical drawings

