

Features

• Integrated LED recessed spotlight, 2-axis adjustable (horizontal rotation 360°, vertical tilt 30°) , white bezel colour, 3 CCT options of 2700-3000-4000k, lumen up to 550lm, 5.4W, dimmable trailing/leading edge, 38° degree beam angle, aluminium and steel body, low profile 37mm recessed depth, IP65 frontal degree, IK07, loop-in/loop-out terminals for fast wiring, 68mm cutout, clear lens. Air-proof, to limit air leakage when used in residential applications within the building’s thermal envelope. Directly coverable with insulation material according to EN60598-1


Product Overview

Product name	OBICO 68 IP65 550lm 3CCT DIM ADJ WHITE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Residential & Consumer
ETIM Class	EC001744
E-number FI	4278505
Fixture luminous flux (lm)	550
Luminaire efficacy (lm/W)	102
Light colour	Cool White
CRI (Ra)	90
Colour Variation Initial (SDCM)	6
Beam Angle (°)	38
Glare control	< 25
Photobiological Risk Group	RG1
Total power consumption (W)	5.4
Electrical protection	Class II

OBICO 68 IP65 550lm 3CCT DIM ADJ WHITE
0005363

Control gear type	LED driver constant current
Housing colour	RAL9016
IP rating	IP65/20
IK rating	IK07
Product EAN number	5410288053639
Warranty	5 years
Dimming method	Mains: leading / trailing edge
Useful luminous flux (#use)	550

Photometry

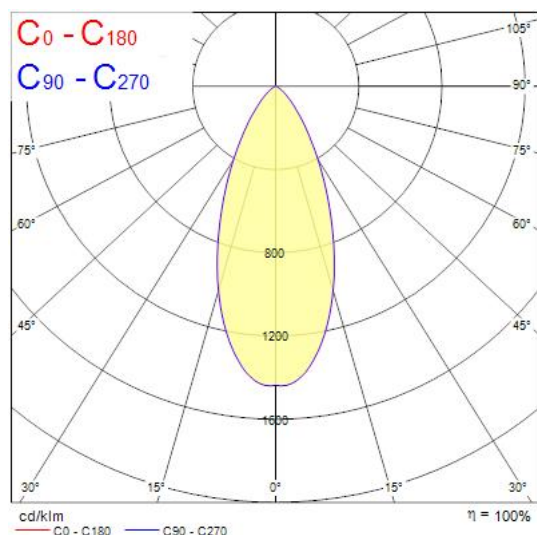

Technical drawings

