

Start Flood IP65 1000LM 830 Black
0050160




Features

- The streamlined, durable, lightweight die-cast aluminium body makes Start Flood IP65 a perfect choice for building facades, car parks, garages and construction areas. The product includes 1 m pre-wired stripped cable and fitting bracket for quick and easy installation and the universal mounting bracket allows wall or surface mounting with the possibility of vertical tilting. Black (RAL9017) housing, white reflector, 1000 lm, 9.5 W, 105 lm/W, 3000K, non dimmable, CRI>80, IP65, IK06, Class I, lifespan L70:B50: 90000 hrs, 100 x 108 x 23 mm (L x W x H). Weight: 0.26 kg.

Product Overview

Cap/Base	N/A
Control gear type	Not required

Photometry

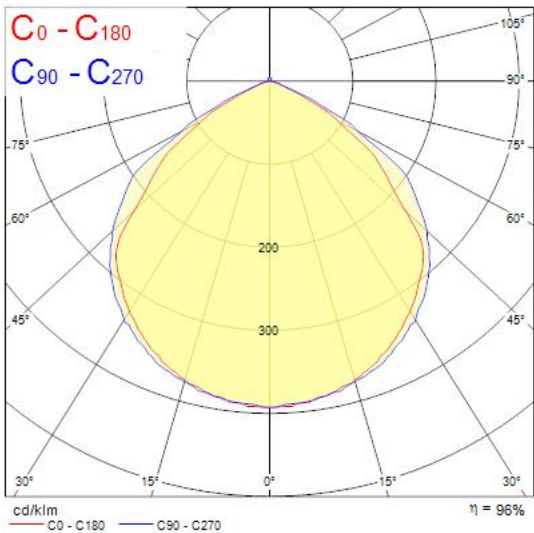

Technical drawings

