

Features

- Insaver is a surface mounted LED downlight ,Die-cast aluminium body, loop in loop out connector for quick installation, Non dimmable LED driver, 20W; 2500lm; 125lm/W; 4000K; UGR <19 with height of 95 mm. Meets TP(a) requirements.


Product Overview

Product name	INSAVER UGR19 220 2500LM 840 SM
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4278546
Fixture luminous flux (lm)	2500
Luminaire efficacy (lm/W)	125
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	70
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	20
Electrical protection	Class II
Control gear type	LED driver constant current

INSAVER UGR19 220 2500LM 840 SM
0030517

LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9010
IP rating	IP20
IK rating	IK07
Product EAN number	5410288305172
Warranty	5 years
Dimming method	N/A
Useful luminous flux (#use)	2500

Photometry

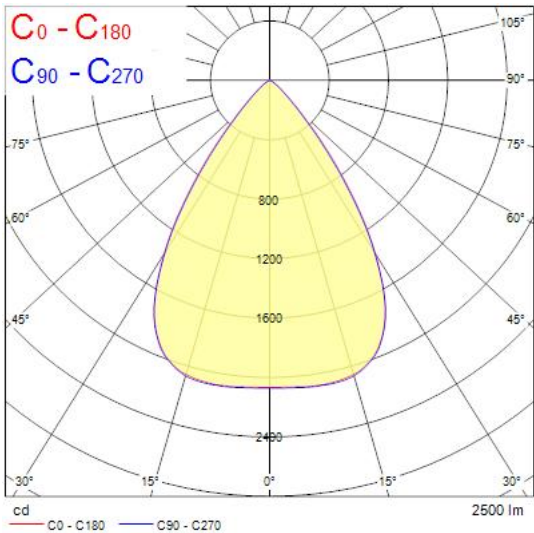

Technical drawings

