


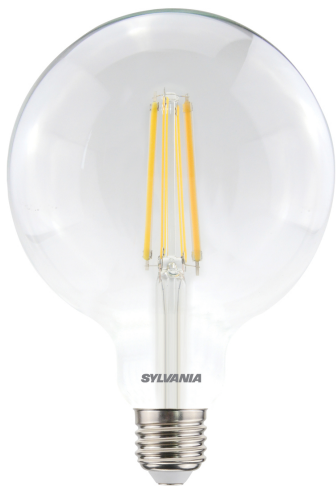

Features

- Perfect for decorative and general lighting applications and creates a warm ambiance similar to traditional lampsSame look, size and functionality as incandescent lampsOmni-directional light distributionSuitable replacement for incandescent and halogen lampsGives same sparkling light effect as incandescent lampDimensionally identical to incandescent lamps - fits all fixturesEnvironment friendly - no mercury and lower CO2 emissions



Product Overview

Product name	ToLEDo RT G125 V5 CL 1521LM 827 E27 SL
Technology	LED
Watt (Rated) (W)	11
Cap/Base	E27
Fixture rating	Open
General application	Hospitality, Residential & Consumer
ETIM Class	EC001959
E-number FI	4740963
Correlated colour temperature (k)	2700
Light colour	Homelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG1
Wattage (W)	11
Power consumption (W)	11
Dimmable	No
Average life (Nominal) (h)	15000
Product EAN number	5410288295466

ToLEDo RT G125 V5 CL 1521LM 827 E27 SL
0029546

Warranty	3 years
Useful luminous flux (#use)	1521

Technical drawings

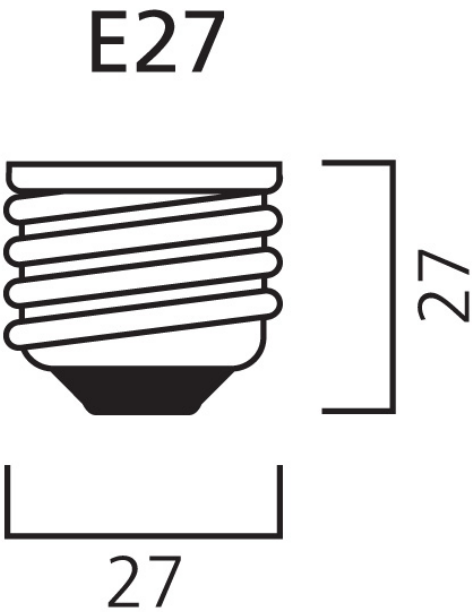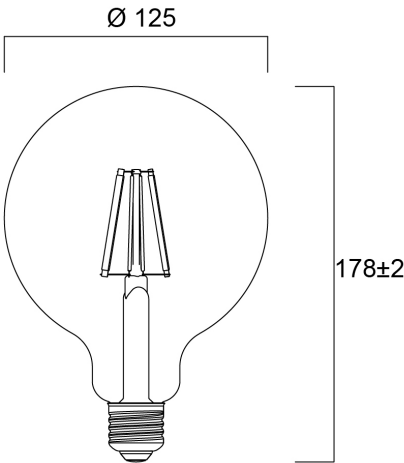

Data table

GENERAL DATA

Product name	ToLEDo RT G125 V5 CL 1521LM 827 E27 SL
Technology	LED
Watt (Rated) (W)	11
Cap/Base	E27
Fixture rating	Open
General application	Hospitality, Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959



ToLEDo RT G125 V5 CL 1521LM 827 E27 SL
0029546

E-number FI	4740963
Warranty	3 years

OPTICAL DATA

Useful luminous flux (#use)	1521
Luminous flux (Rated) (lm)	1521
Correlated colour temperature (k)	2700
Light colour	Homelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG1
Lumen maintenance at end of nominal life (%)	70

ELECTRICAL DATA

Power consumption (W)	11
Wattage (W)	11
Equivalent watt (W)	100
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Control gear required	No
No. Of switching cycles before premature failures	>50000
Dimmable	No
Inrush Current (A)	5.93
Inrush Duration (µs)	180
Lamp Energy Label (class)	D
Nominal Frequency (Hz)	50/60Hz
Max. products per 16A C Breaker	27
Max. products per 16A B Breaker	13

LIFETIME DATA

Lifespan L70 B50	15000
Average life (Nominal) (h)	15000



ToLEDo RT G125 V5 CL 1521LM 827 E27 SL
0029546

Average life (Rated) (h)	15000
--------------------------	-------

PHYSICAL DATA

Nominal Product Length (mm)	178
Nominal Product Diameter (mm)	125
Weight (kg)	0.135


PACKAGING

Product EAN number	5410288295466
Packaging single length / height (cm)	19.0
Packaging single width (cm)	13.0
Packaging single depth (cm)	13.0
DUN14 (inner)	15410288295463
Units per outer package	6
Packaging outer length / height (cm)	20.0
Packaging outer width (cm)	80.3
Packaging outer depth (cm)	13.5

SAFETY DATA

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures


Energy label

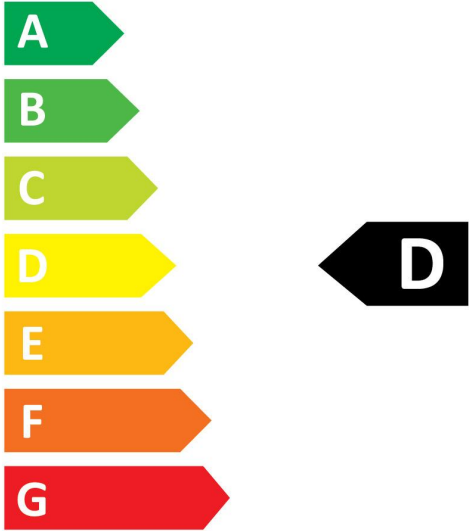

11
kWh/1000h



2019/2015

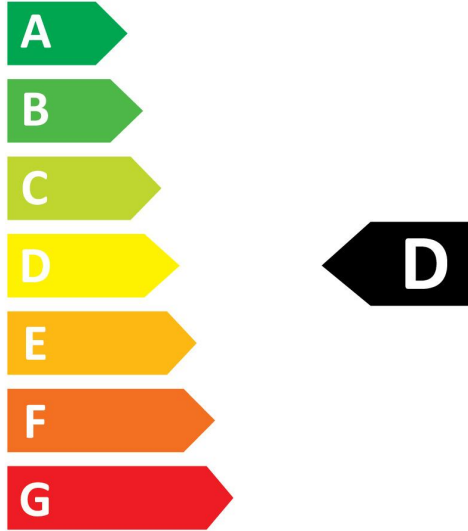

11
kWh/1000h



2019/2015