















Features


• SylSafe XSpot OA R EM3 NM MS is a miniature emergency recessed spotlight with small form factor - cut-out diameter: 10mm. Non-maintained 3 hr emergency duration with NiMH rechargeable battery. Recharge period 24 hours. Quick and easy installation with driver module and battery pack contained in articulated case that can placed near the luminaire. Suitable for sheet metal installation. 80lm, 2.8W, IK03, IP20. Power Factor 0.45. Class II electrical construction.

Product Overview


Product name	SylSafe XSpot OA R EM3 NM MS
Technology	LED
Mount	Ceiling recessed mounting
General application	Office, Hospitality, Retail, Education, Museums &
	Galleries
ETIM Class	EC001957
Fixture luminous flux (lm)	80
Luminaire efficacy (lm/W)	29
Correlated colour temperature (k)	5700
CRI (Ra)	70
Photobiological Risk Group	RG2
Luminous flux (emergency) (lm)	80
Electrical protection	Class II
Housing colour	White
IP rating	IP20
IK rating	IK03
Product EAN number	5410288417752
Warranty	5 years




Photometry

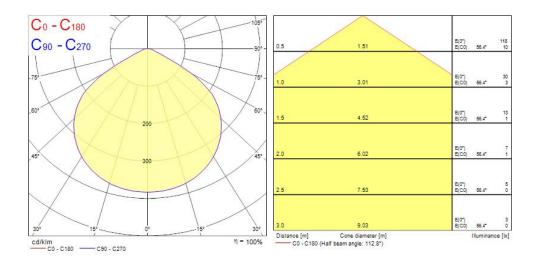

Technical drawings





Data table

GENERAL DATA

Product name

SylSafe XSpot OA R EM3 NM MS



Technology	LED
Mount	Ceiling recessed mounting
General application	Office, Hospitality, Retail, Education, Museums & Galleries
ETIM Class	EC001957
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	80
Luminaire efficacy (Im/W)	29
Correlated colour temperature (k)	5700
CRI (Ra)	70
Photobiological Risk Group	RG2
Luminous flux (emergency) (lm)	80
Emergency duration (h)	3

ELECTRICAL DATA

Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.45
Electrical protection	Class II
Control gear required	Yes
Drive current (mA)	30
Nominal Frequency (Hz)	50/60Hz

PHYSICAL DATA

Housing colour	White
IP rating	IP20
IK rating	IK03
Nominal Product Length (mm)	12
Nominal Product Width (mm)	12
Nominal Product Height (mm)	26.5
Weight (kg)	0.32



PACKAGING

Product EAN number	5410288417752
Packaging single length / height (cm)	21.0
Packaging single width (cm)	9.3
Packaging single depth (cm)	4.7
DUN14 (inner)	15410288417759
Units per outer package	25
Packaging outer length / height (cm)	42.4
Packaging outer width (cm)	29.8
Packaging outer depth (cm)	28.0

SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No