



Features

- Led exterior bulkhead, Unique feature allowing a choice between High Output or High Efficiency with the flick of a switch, 759/1477LM, 9/17W, 84/87LM/W, 4000K, Driver Current: 350/750mA, CRI80, Non dimmable, IP65, IK10, lifespan 100,000hrs (L70:B50), (HxWxD) 350 x 350 x 128mm, 3.4kg, 3 step MacAdam ellipse, RAL 9005, Class 1, 230V

Product Overview

Product name	STERLING IP65 IK10 1477LM 840 BLACK
Technology	LED
Cap/Base	N/A
Environment	Indoor, Outdoor
General application	Education, Hospitality, Logistics & Industry, Office, Residential & Consumer, Retail
ETIM Class	EC002892
E-number FI	4579256
Fixture luminous flux (lm)	1477
Luminaire efficacy (lm/W)	87
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Photobiological Risk Group	RG1
Total power consumption (W)	17
Electrical protection	Class I
Dimmable	No
Housing colour	Black
IP rating	IP65
IK rating	IK10


Concord

STERLING IP65 IK10 1477LM 840 BLACK

4063835

Product EAN number	5026524638357
Warranty	5 years
Dimming method	N/A

Photometry

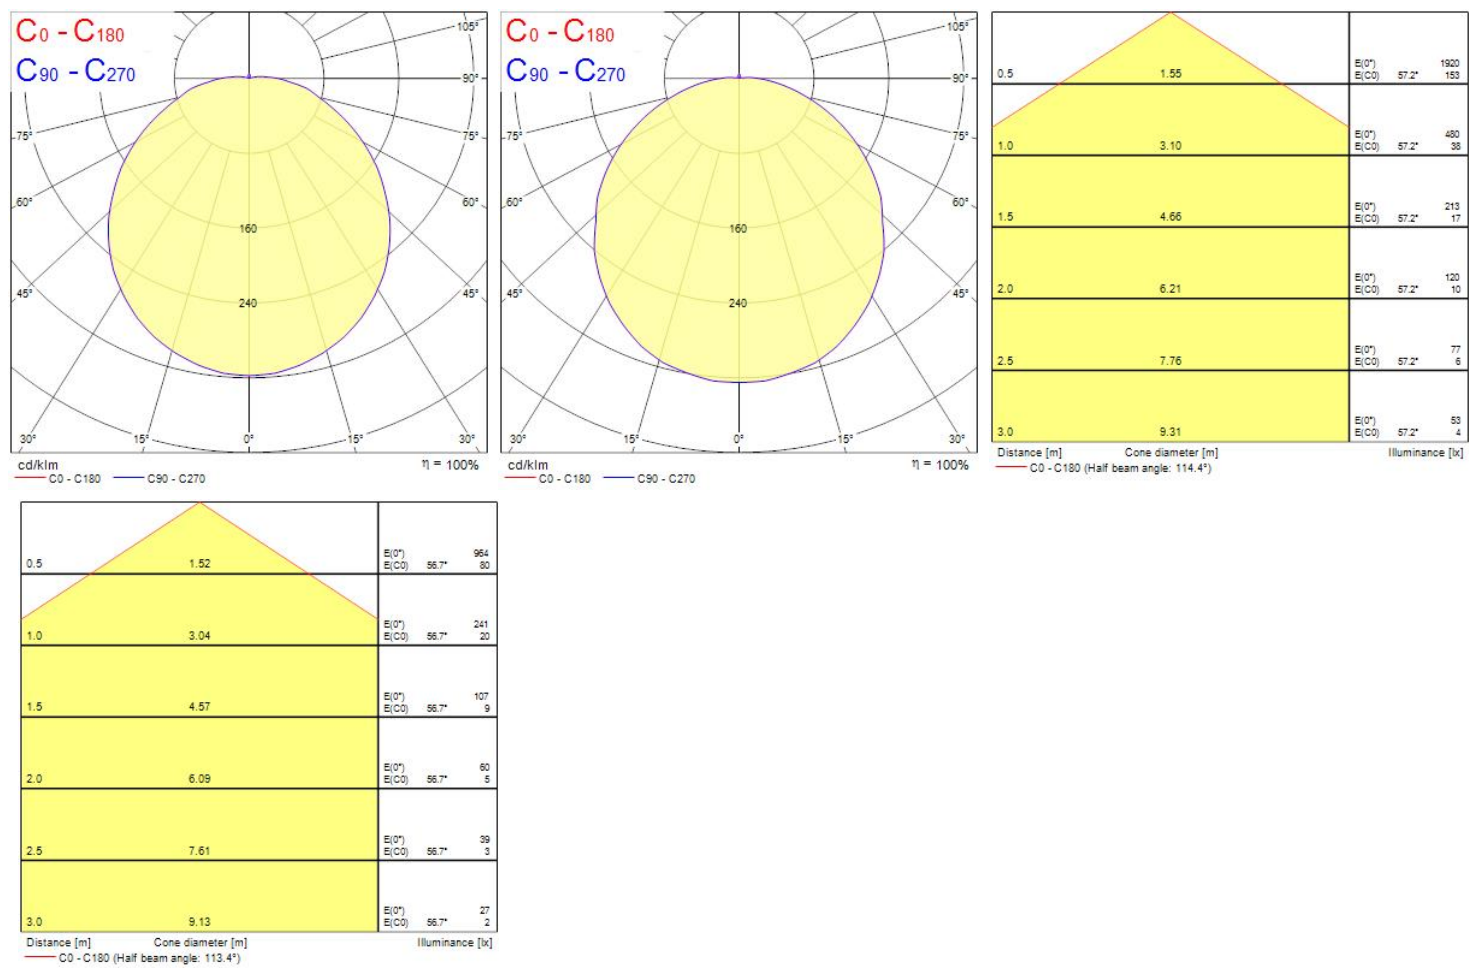


Concord

STERLING IP65 IK10 1477LM 840 BLACK

4063835

Technical drawings

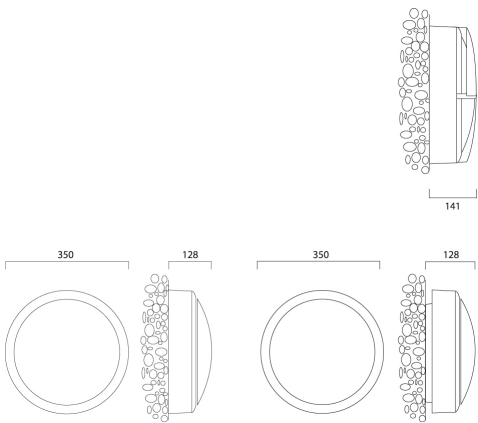

Data table

GENERAL DATA

Product name	STERLING IP65 IK10 1477LM 840 BLACK
Technology	LED
Cap/Base	N/A
Environment	Indoor, Outdoor
General application	Education, Hospitality, Logistics & Industry, Office, Residential & Consumer, Retail
Operating temperature range (°C)	-20°C...+35°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4579256
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	1477
Luminaire efficacy (lm/W)	87
LOR (%)	100

STERLING IP65 IK10 1477LM 840 BLACK 4063835

Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	17
Primary Supply/Product voltage - min (V)	230.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.95
Electrical protection	Class I
Control gear required	No
Dimmable	No
Dimming method	N/A
Drive current (mA)	700
Inrush Current (A)	17
Inrush Duration (µs)	199
Energy Efficiency Class (A->G) of contained light source	B
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	38
Max. products per 13A C Breaker	50
Max. products per 16A C Breaker	61
Max. products per 20A C Breaker	78
Max. products per 10A B Breaker	23
Max. products per 13A B Breaker	30
Max. products per 16A B Breaker	37
Max. products per 20A B Breaker	47

LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	68500

PHYSICAL DATA

Housing colour	Black
IP rating	IP65
IK rating	IK10
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Height (mm)	128
Nominal Product Diameter (mm)	350
Weight (kg)	3.4

PACKAGING

Product EAN number	5026524638357
Packaging single length / height (cm)	36.0
Packaging single width (cm)	36.0
Packaging single depth (cm)	13.5
DUN14 (inner)	05026524638357
Units per outer package	1
Packaging outer length / height (cm)	36.0
Packaging outer width (cm)	36.0
Packaging outer depth (cm)	13.5

SAFETY DATA

Optimal operating condition (°C)	-20-35
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No