



Features

• Muro Surface is a wall mounted fixture for exterior lighting applications with 3 hours combined non-maintained, automatic self test emergency unit. Comes with aluminium housing in RAL7016 anthracite grey colour, frosted PC diffuser, IP65, IK10, Class I, 4000K, non-dimmable multipower driver with 5 settings, 1700 / 1900 / 2750 / 3150 / 3250 lm, 16 / 18 / 26 / 29 / 30 W, up to 109 lm/W total system efficacy, switchable built in Mini photocell, CRI80, Asymmetrical beam, 119.000 hrs L70B50 lifespan, 304 x 305 x 155 mm (L x W x D) dimensions, 4.32 kg weight.


Product Overview

Product name	Muro Surface IP65 1700-3250lm 840 PH E3 Grey
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Wall surface mounted
General application	Hospitality, Logistics & Industry, Museums & Galleries, Office
ETIM Class	EC002892
Fixture luminous flux (lm)	3250
Luminous flux (lm)	3250
Luminaire efficacy (lm/W)	108
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	165
Total power consumption (W)	30

Muro Surface IP65 1700-3250lm 840 PH E3 Grey
0049945

Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL7016
IP rating	IP65
IK rating	IK10
Product EAN number	5410288499451
Warranty	5 years
Dimming method	N/A
Useful luminous flux (#use)	3250

Photometry

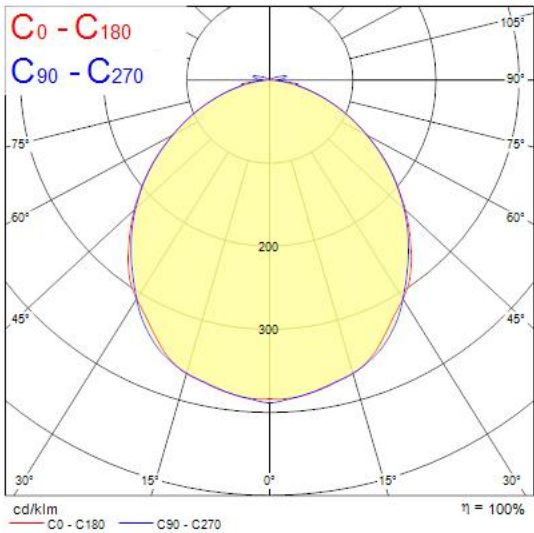

Technical drawings

