


Concord

COLOSSAL 1200mm 940 OPAL DIR+HAL WHITE SSC 2071324

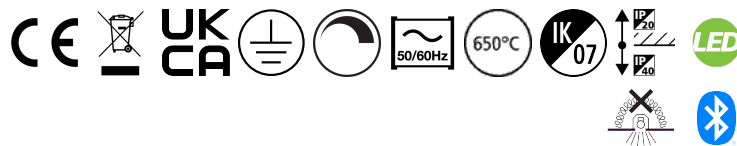

Features

- 1200mm diameter circular architectural luminaire, can be surface mounted or suspended. Powder coated aluminium housing (RAL9016) with polycarbonate opal diffuser. Direct/indirect (halo) light distribution, 18885lm luminous flux, 153.6W system power, 123lm/W luminaire efficacy. Sylsmart Standalone enabled. Colour rendering index Ra >90, 4000K Neutral White LED, chromaticity tolerance of 3-step MacAdam ellipse. IP40/IP20, IK03. 450mA drive current. Electrical protection Class I, 220-240V. Reported lifetime 66k hours L90B10.

Product Overview


Product name	COLOSSAL 1200mm 940 OPAL DIR+HAL WHITE SSC
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
General application	Hospitality, Office
ETIM Class	EC002892
Fixture luminous flux (lm)	18885
Luminaire efficacy (lm/W)	123
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Glare control	< 22
Photobiological Risk Group	RG0
Total power consumption (W)	153.6
Electrical protection	Class I

Concord

COLOSSAL 1200mm 940 OPAL DIR+HAL WHITE SSC 2071324

Control gear type	LED driver constant current
Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9016
IP rating	IP40/20
IK rating	IK07
Product EAN number	5025768713240
Warranty	5 years
Dimming method	SylSmart SSC
Colour Code	940


Photometry

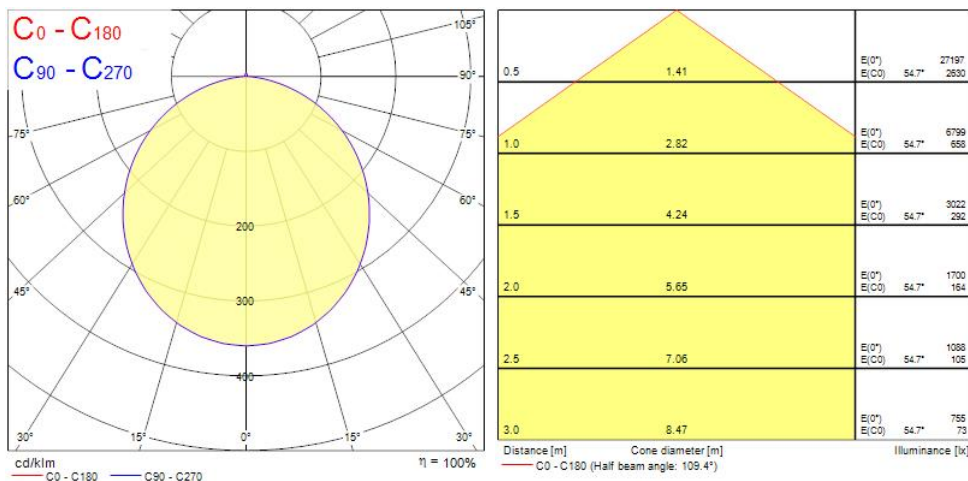

Concord

COLOSSAL 1200mm 940 OPAL DIR+HAL WHITE SSC
2071324

Technical drawings

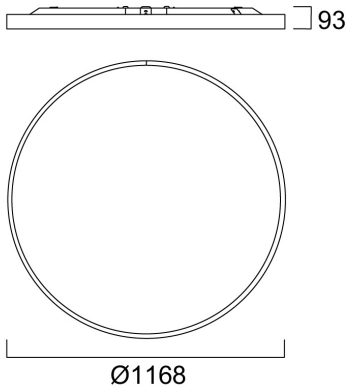

Data table

GENERAL DATA

Product name	COLOSSAL 1200mm 940 OPAL DIR+HAL WHITE SSC
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
General application	Hospitality, Office
Operating temperature range (°C)	5°C...+25°C
ETIM Class	EC002892
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	18885
Luminaire efficacy (lm/W)	123
Correlated colour temperature (k)	4000
Colour Code	940

Concord

COLOSSAL 1200mm 940 OPAL DIR+HAL WHITE SSC 2071324

Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Distribution type	Symmetric
Glare control	< 22
Photobiological Risk Group	RG0

ELECTRICAL DATA

Total power consumption (W)	153.6
Current (A)	450
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) \leq xx.x %	10
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart SSC
Drive current (mA)	450
Inrush Current (A)	25
Inrush Duration (μ s)	280
Energy Efficiency Class (A->G) of contained light source	C, C(more than 1 Light Source)
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	24
Max. products per 13A C Breaker	31
Max. products per 16A C Breaker	40
Max. products per 20A C Breaker	49
Max. products per 10A B Breaker	13
Max. products per 16A B Breaker	24
Max. products per 20A B Breaker	30

Concord

COLOSSAL 1200mm 940 OPAL DIR+HAL WHITE SSC 2071324

Connectable conductor cross section - Min (mm ²)	1.5
---	-----

Connectable conductor cross section - Max (mm ²)	2.5
---	-----

LIFETIME DATA

Lifespan L70 B50	170000
------------------	--------

Lifespan L80 B20	145000
------------------	--------

Lifespan L90 B10	66000
------------------	-------

PHYSICAL DATA

Housing colour	RAL9016
----------------	---------

IP rating	IP40/20
-----------	---------

IK rating	IK07
-----------	------

Diffuser finish	Opal
-----------------	------

Diffuser material	PC Polycarbonate
-------------------	------------------

Nominal Product Height (mm)	93
-----------------------------	----

Nominal Product Diameter (mm)	1168
-------------------------------	------

Weight (kg)	23.0
-------------	------

PACKAGING

Product EAN number	5025768713240
--------------------	---------------

Packaging single length / height (cm)	14.0
---------------------------------------	------

Packaging single width (cm)	123.0
-----------------------------	-------

Packaging single depth (cm)	123.0
-----------------------------	-------

DUN14 (inner)	05025768713240
---------------	----------------

Units per outer package	1
-------------------------	---

Packaging outer length / height (cm)	14.0
--------------------------------------	------

Packaging outer width (cm)	123.0
----------------------------	-------

Packaging outer depth (cm)	123.0
----------------------------	-------

SAFETY DATA

Glow Wire Test (°C)	650
---------------------	-----

Concord

COLOSSAL 1200mm 940 OPAL DIR+HAL WHITE SSC
2071324

Optimal operating condition (°C)	5-25
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No