



Features

- Compact, energy efficient and exceptional value for money product Same shape and size as halogen MR16 lamp Compact Cluster SMD technology enabling high efficiency with halogen look Reduced visible heat sink from the front Available in 36 degree High lumen efficacy 12V AC/DC 25,000 hours average rated life 3 years warranty


Product Overview

Product name	RefLED Superia Retro MR16 V2 425LM 830 36° SL
Technology	LED
Watt (Rated) (W)	4.6
Fixture rating	Open
General application	Education, Hospitality, Residential & Consumer
ETIM Class	EC001959
E-number FI	4741110
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	6
Colour Variation Initial (SDCM)	6
Beam Angle (°)	36
Photobiological Risk Group	RG1
Wattage (W)	4.6
Power consumption (W)	4.6
Dimmable	No
Average life (Nominal) (h)	25000
Product EAN number	5410288292304

RefLED Superia Retro MR16 V2 425LM 830 36° SL
0029230

Warranty	3 years
Useful luminous flux (#use)	460

Technical drawings

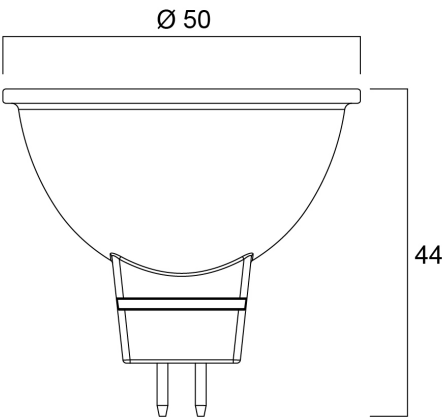

Data table

GENERAL DATA

Product name	RefLED Superia Retro MR16 V2 425LM 830 36° SL
Technology	LED
Watt (Rated) (W)	4.6
Fixture rating	Open
General application	Education, Hospitality, Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
E-number FI	4741110
Warranty	3 years

OPTICAL DATA

Useful luminous flux (#use)	460
-----------------------------	-----



RefLED Superia Retro MR16 V2 425LM 830 36° SL
0029230

Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Colour Consistency (SDCM)	6
Luminous Intensity (cd)	900
Beam Angle (°)	36
Photobiological Risk Group	RG1
Lumen maintenance at end of nominal life (%)	70

ELECTRICAL DATA

Power consumption (W)	4.6
Wattage (W)	4.6
Equivalent watt (W)	40
Primary Supply/Product voltage - min (V)	12
Primary Supply/Product voltage - max (V)	12
Control gear required	Yes
No. Of switching cycles before premature failures	>50000
Dimmable	No
Lamp Energy Label (class)	F

LIFETIME DATA

Lifespan L70 B50	25000
Average life (Nominal) (h)	25000
Average life (Rated) (h)	25000

PHYSICAL DATA

Nominal Product Length (mm)	44
Nominal Product Diameter (mm)	50
Weight (kg)	0.03

PACKAGING

RefLED Superia Retro MR16 V2 425LM 830 36° SL 0029230


Product EAN number	5410288292304
Packaging single length / height (cm)	6.1
Packaging single width (cm)	5.1
Packaging single depth (cm)	8.2
DUN14 (inner)	15410288292301
Units per inner package	6
Packaging inner length / height (cm)	19.4
Packaging inner width (cm)	11.4
Packaging inner depth (cm)	9.4
DUN14 (outer)	25410288292308
Units per outer package	36
Packaging outer length / height (cm)	36.2
Packaging outer width (cm)	21.7
Packaging outer depth (cm)	21.9

SAFETY DATA

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

RefLED Superia Retro MR16 V2 425LM 830 36° SL
0029230


Energy label

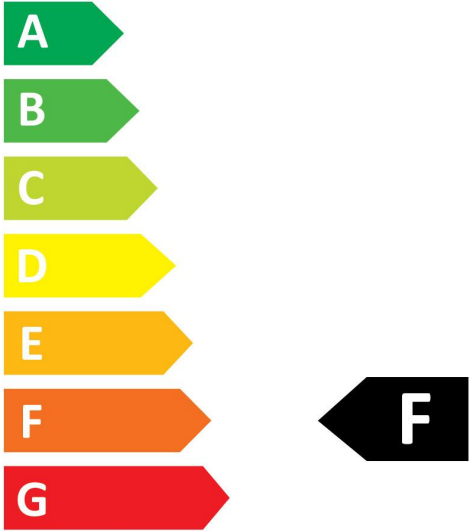

5
kWh/1000h



2019/2015

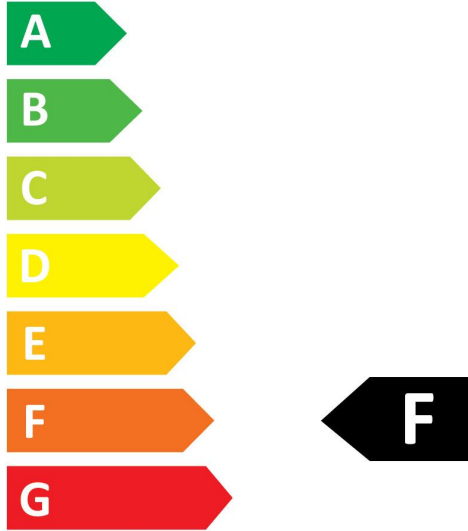

5
kWh/1000h



2019/2015