



Features

- Energy efficient and affordable LED T8 solution to replace conventional fluorescent T8 lamps
- Omni-directional uniform light distribution thanks to glass tube construction design, same as traditional fluorescent T8 tubes
- Lumen output - 1800lm
- High lumen efficacy - 135 lm/W
- Switching cycles - 200,000X
- Average rated life 30,000 hours
- Lamp length - 1200mm
- Wide beam angle
- Suitable for general illumination in offices, supermarkets, department stores, parking lots
- Suitable for operation with electromagnetic gears/CCG and direct mains operation (220-240V)
- 3-Year warranty




Product Overview

Product name	ToLEDo NEOS T8 CCG L1200 1800LM 840 30K RL
Technology	LED
Lamp shape	Tube, double-ended
Cap/Base	G13
Lamp finish	Frosted/Coated
General application	Education, Logistics & Industry, Office, Residential & Consumer
ETIM Class	EC001959
E-number FI	4941337
Correlated colour temperature (k)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	170
Photobiological Risk Group	RG0
Wattage (W)	13.3
Power consumption (W)	13.3
Dimmable	No
IP rating	IP20
Product EAN number	5410288302324

ToLEDo NEOS T8 CCG L1200 1800LM 840 30K RL
0030232

Warranty	3 years
Useful luminous flux (#use)	1800

Technical drawings

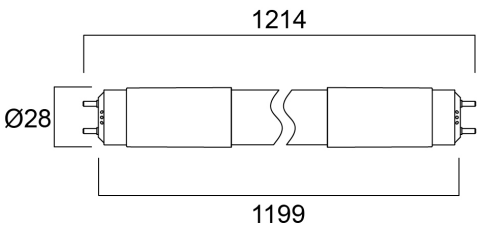

Data table

GENERAL DATA

Product name	ToLEDo NEOS T8 CCG L1200 1800LM 840 30K RL
Technology	LED
Lamp shape	Tube, double-ended
Cap/Base	G13
Lamp finish	Frosted/Coated
General application	Education, Logistics & Industry, Office, Residential & Consumer
Operating temperature range (°C)	-20°C...+45°C
ETIM Class	EC001959
E-number FI	4941337
Warranty	3 years

OPTICAL DATA

Useful luminous flux (#use)	1800
-----------------------------	------



ToLEDo NEOS T8 CCG L1200 1800LM 840 30K RL
0030232

Correlated colour temperature (k)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	170
Photobiological Risk Group	RG0

ELECTRICAL DATA

Power consumption (W)	13.3
Wattage (W)	13.3
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.5
Control gear required	No
Dimmable	No
Inrush Current (A)	13.7
Inrush Duration (µs)	27
Lamp Energy Label (class)	D
Nominal Frequency (Hz)	50/60Hz

LIFETIME DATA

Lifespan L70 B50	30000
------------------	-------

PHYSICAL DATA

IP rating	IP20
Nominal Product Length (mm)	1198
Nominal Product Diameter (mm)	28
Weight (kg)	0.25

PACKAGING

Product EAN number	5410288302324
Packaging single length / height (cm)	126.0
Packaging single width (cm)	2.8



ToLEDo NEOS T8 CCG L1200 1800LM 840 30K RL
0030232

Packaging single depth (cm)	2.8
DUN14 (inner)	15410288302321
Units per outer package	10
Packaging outer length / height (cm)	129.0
Packaging outer width (cm)	15.5
Packaging outer depth (cm)	8.5

SAFETY DATA


Optimal operating condition (°C)	-20-45
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

ToLEDo NEOS T8 CCG L1200 1800LM 840 30K RL
0030232

Energy label



0030232

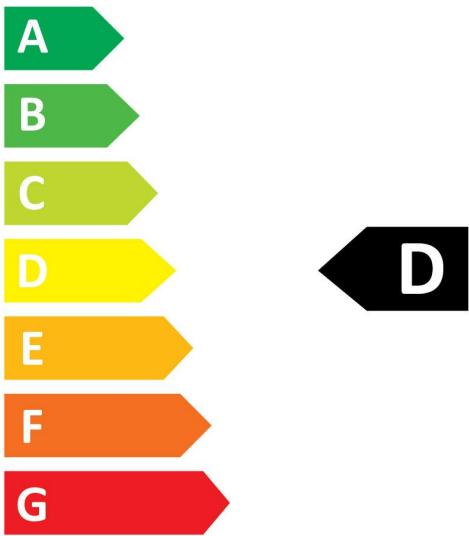


14 kWh/1000h



2019/2015



0030232

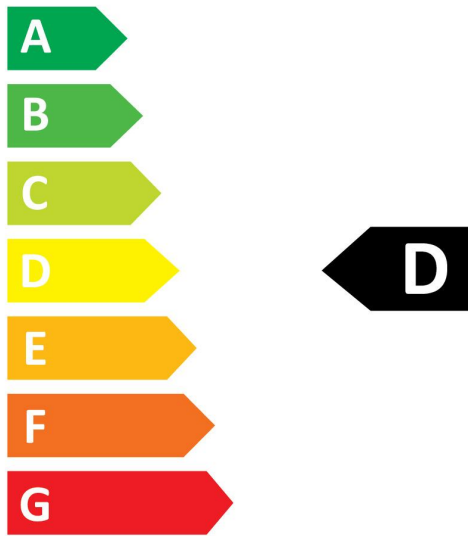

14 kWh/1000h



2019/2015