

## MC2 D/I KIT 1.2M 4K DALI BLK OPAL 2071565



### Features

• MC2-KIT D/I 1.2M 4K DALI BLK OPAL LED luminaire, black RAL9005 finishing, direct/indirect distribution (65/35), suspended kit version is pre-wired and supplied complete with end caps and suspension cables, compact and minimalist design based on the Golden Mean, ideal for offices, meeting rooms, corridors, education facilities, museums and libraries, extruded aluminium body, diffuser: opal, colour temperature: 4000K neutral white, total system power: 29W, total fixture output: 4050lm, luminaire efficacy: 140lm/W, LOR: 100%, colour rendering: Ra >80, LED Chromacity: 3 step MacAdam ellipse, lifespan: 66,000 hours L90B10, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: (Direct) 800mA + (Indirect) 350mA, electronic driver, DALI dimmable, direct/indirect independently addressable, electrical protection: CLASS I, IP20, suitable for internal environment only.


### Product Overview

|                                   |                                        |
|-----------------------------------|----------------------------------------|
| Product name                      | MC2 D/I KIT 1.2M 4K DALI BLK OPAL      |
| Technology                        | LED (3 SDCM)                           |
| Cap/Base                          | N/A                                    |
| Housing                           | Aluminium                              |
| Mount                             | Suspended                              |
| General application               | Education, Hospitality, Office, Retail |
| ETIM Class                        | EC001743                               |
| E-number FI                       | 4170310                                |
| Fixture luminous flux (lm)        | 4050                                   |
| Luminaire efficacy (lm/W)         | 140                                    |
| LOR (%)                           | 100                                    |
| Correlated colour temperature (k) | 4000                                   |
| Light colour                      | Neutral White                          |
| CRI (Ra)                          | 80                                     |

## MC2 D/I KIT 1.2M 4K DALI BLK OPAL 2071565

|                                 |                    |
|---------------------------------|--------------------|
| Colour Variation Initial (SDCM) | 3                  |
| Glare control                   | < 21               |
| Photobiological Risk Group      | RG0                |
| Total power consumption (W)     | 29                 |
| Electrical protection           | Class I            |
| Control gear type               | Electronic ballast |
| Dimmable                        | Yes                |
| Minimum dimming level (%)       | 1                  |
| Housing colour                  | Black              |
| IP rating                       | IP20               |
| IK rating                       | IK03               |
| Product EAN number              | 5025768715657      |
| Warranty                        | 5 years            |
| Dimming method                  | DALI               |

## Photometry

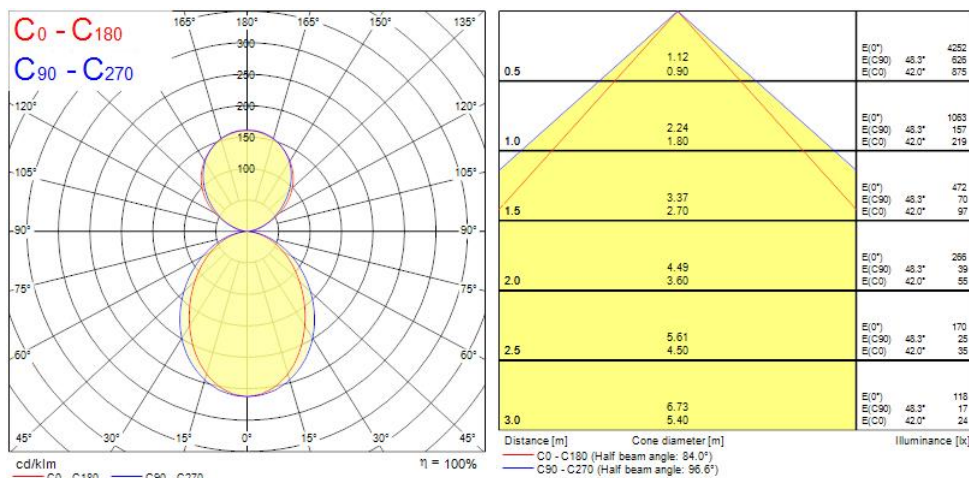


# Concord

## MC2 D/I KIT 1.2M 4K DALI BLK OPAL

### 2071565

#### Technical drawings

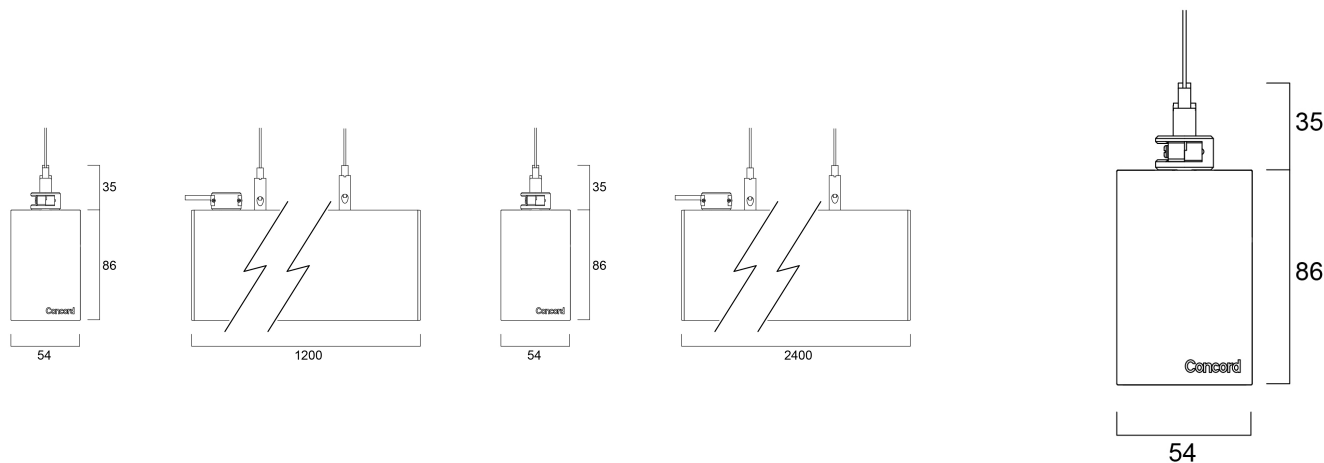

#### Data table

##### GENERAL DATA

|                                         |                                        |
|-----------------------------------------|----------------------------------------|
| Product name                            | MC2 D/I KIT 1.2M 4K DALI BLK OPAL      |
| Technology                              | LED (3 SDCM)                           |
| Cap/Base                                | N/A                                    |
| Housing                                 | Aluminium                              |
| Mount                                   | Suspended                              |
| General application                     | Education, Hospitality, Office, Retail |
| Operating temperature range (°C)        | 1°C...+40°C                            |
| Performance ambient temperature Tq (°C) | 25                                     |
| ETIM Class                              | EC001743                               |
| E-number FI                             | 4170310                                |
| Warranty                                | 5 years                                |

##### OPTICAL DATA

|                            |      |
|----------------------------|------|
| Fixture luminous flux (lm) | 4050 |
|----------------------------|------|

## MC2 D/I KIT 1.2M 4K DALI BLK OPAL 2071565

|                                   |               |
|-----------------------------------|---------------|
| Luminaire efficacy (lm/W)         | 140           |
| LOR (%)                           | 100           |
| Correlated colour temperature (k) | 4000          |
| Light colour                      | Neutral White |
| CRI (Ra)                          | 80            |
| Colour Variation Initial (SDCM)   | 3             |
| Adjustable chromaticity           | N             |
| Luminous Intensity (cd)           | 1063          |
| Distribution type                 | Symmetric     |
| Glare control                     | < 21          |
| Photobiological Risk Group        | RG0           |

### ELECTRICAL DATA

|                                                                  |                                |
|------------------------------------------------------------------|--------------------------------|
| Total power consumption (W)                                      | 29                             |
| Primary Supply/Product voltage - min (V)                         | 220.0                          |
| Primary Supply/Product voltage - max (V)                         | 240.0                          |
| Lamp power factor                                                | 0.95                           |
| THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x % | 10                             |
| Electrical protection                                            | Class I                        |
| Control gear required                                            | No                             |
| Control gear type                                                | Electronic ballast             |
| Dimmable                                                         | Yes                            |
| Dimming method                                                   | DALI                           |
| Minimum dimming level (%)                                        | 1                              |
| Min. drive current (mA)                                          | 350                            |
| Max. drive current (mA)                                          | 1050                           |
| Drive current - Range (mA)                                       | 350mA / 1050mA                 |
| Inrush Current (A)                                               | 53                             |
| Inrush Duration (µs)                                             | 200                            |
| Energy Efficiency Class (A->G) of contained light source         | C, B(more than 1 Light Source) |
| Nominal Frequency (Hz)                                           | 50/60Hz                        |
| Max. products per 10A C Breaker                                  | 21                             |
| Max. products per 16A C Breaker                                  | 48                             |

## MC2 D/I KIT 1.2M 4K DALI BLK OPAL 2071565

|                                                    |     |
|----------------------------------------------------|-----|
| Max. products per 16A B Breaker                    | 22  |
| Connectable conductor cross section -<br>Max (mm²) | 1.5 |

### LIFETIME DATA

|                  |        |
|------------------|--------|
| Lifespan L70 B50 | 120000 |
| Lifespan L80 B20 | 92500  |
| Lifespan L90 B10 | 66000  |

### PHYSICAL DATA

|                             |                  |
|-----------------------------|------------------|
| Housing colour              | Black            |
| IP rating                   | IP20             |
| IK rating                   | IK03             |
| Diffuser finish             | Opal             |
| Diffuser material           | PC Polycarbonate |
| Reflector finish            | Not Applicable   |
| Nominal Product Length (mm) | 1200             |
| Nominal Product Width (mm)  | 54               |
| Nominal Product Height (mm) | 86               |
| Weight (kg)                 | 3.2              |

### PACKAGING

|                                       |                |
|---------------------------------------|----------------|
| Product EAN number                    | 5025768715657  |
| Packaging single length / height (cm) | 121.0          |
| Packaging single width (cm)           | 11.0           |
| Packaging single depth (cm)           | 11.0           |
| DUN14 (inner)                         | 05025768715657 |
| Units per outer package               | 1              |
| Packaging outer length / height (cm)  | 121.0          |
| Packaging outer width (cm)            | 11.0           |
| Packaging outer depth (cm)            | 11.0           |

### SAFETY DATA

# Concord

MC2 D/I KIT 1.2M 4K DALI BLK OPAL  
2071565

|                                     |      |
|-------------------------------------|------|
| Glow Wire Test (°C)                 | 650  |
| Optimal operating condition (°C)    | 1-40 |
| Special purpose lamp                | No   |
| Dry applications use only           | No   |
| Suitable for household illumination | No   |