

Features

• Insaver is a ceiling recessed LED downlight (IP54 from the front), Die-cast aluminium body, loop in loop out connector for quick installation, Non dimmable LED driver, 4000K; UGR <19 with shallow product depth 60mm. The range features a multipower functionality where the luminous flux of the luminaire can be tailored to local needs by only setting a quick selector switch on the driver (4.9W 650lm, 6.4W 860lm, 8.1W 1090lm, 9.7W 1290lm, 11W 1450lm, 13W 1700lm, 14.5W 1850lm, 16W 2050lm). Meets TP(a) requirements.


Product Overview

Product name	Insaver U19 IP54 205 620-2050 840 Multi
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4278528
Fixture luminous flux (lm)	2050
Luminaire efficacy (lm/W)	128
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	70
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	16
Electrical protection	Class II

Insaver U19 IP54 205 620-2050 840 Multi
0030551

Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9010
IP rating	IP54/20
IK rating	IK07
Product EAN number	5410288305516
Warranty	5 years
Dimming method	N/A

Photometry

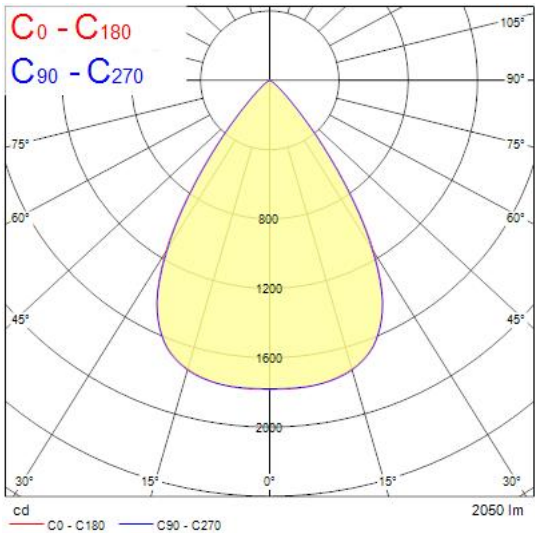

Technical drawings

