



Features

• Linear LED Luminaire, RAL9003 (white) finishing, direct distribution, standard surface mounted version complete with end caps and surface brackets, additional mounting options with accessories, 50mm wide extruded aluminium profile, opal diffuser, ideal for offices, meeting rooms, corridors, education facilities, museums and libraries, power and CCT switch options at the back of the luminaire, colour temperature: 3000K/4000K CCT options, CRi (Ra) >80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), non-dimmable driver, 4-steps combined dip-switch for direct and D/I light distribution, 2-steps power dip swith in direct mode (24-26W), max system power: 26W, max fixture output: 3250lm @ 4000K CCT, efficacy at max output 125lm/W, additional 2-steps power dip switch when indirect module added (36-39W), max system power in D/I combination: 39W, max fixture output: 4850lm @ 4000K CCT, efficacy at max output 124lm/W, electrical protection: Class I, IP20 ingress protection, IK03 impact resistance level, suitable for indoor environment only, lifespan: 100,000 hours L80B50, operating voltage: 220-240V / 50-60Hz, nominal size: 1147x50x73mm, shipped with through wiring.


Product Overview

Technology	LED (3 SDCM)
Cap/Base	N/A
Mount	Ceiling recessed mounting, Ceiling surface mounting, Suspended, Wall surface mounted
General application	Office, Education
ETIM Class	EC002892
E-number FI	4170585

OTAO LINEAR 1.2 OPAL 830/840 MP WH
0041800

Luminaire efficacy (lm/W)	125
Light colour	Warm White or Neutral White
CRI (Ra)	80
Beam Angle (°)	110
Photobiological Risk Group	RG0
Total power consumption (W)	26
Control gear type	LED driver constant current
Dimmable	No
IK rating	IK03
Product EAN number	5410288418001
Warranty	5 years
Dimming method	N/A

Photometry

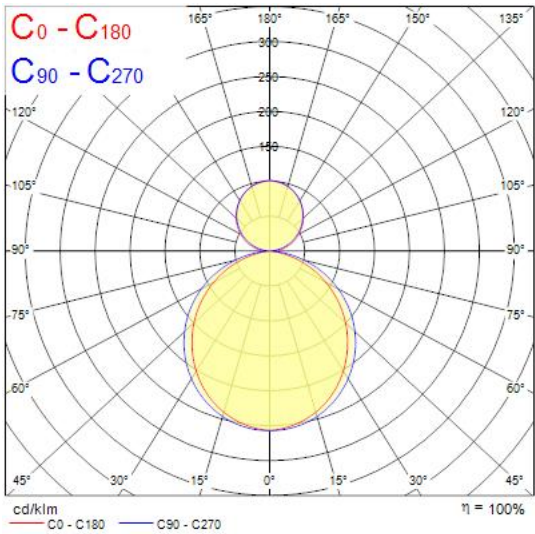

Technical drawings

