

RESISTO 1500 HE IP65 8300LM 840 SSA03L
0010438



Features

• Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 8300lm; 56W; 154lm/W; 4000K; SDCM<3; CRI80; IP65; IK08 (sensor IK03); Class I; 69,000hrs (L80B20) lifespan; 1588mm x 89mm x 88mm; D-mark. SylSmart® Connected integration delivers enhanced functionality, enabling comprehensive lighting control and monitoring via an integrated Low Bay Sensor and Bluetooth® NLC


Product Overview

Product name	RESISTO 1500 HE IP65 8300LM 840 SSA03L
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
General application	Logistics & Industry
ETIM Class	EC002892
Fixture luminous flux (lm)	8300
Luminaire efficacy (lm/W)	154
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Beam Angle (°)	110
Glare control	< 25

RESISTO 1500 HE IP65 8300LM 840 SSA03L
0010438

Photobiological Risk Group	RG1
Total power consumption (W)	54
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288104386
Warranty	5 years
Dimming method	SylSmart SSA

Photometry

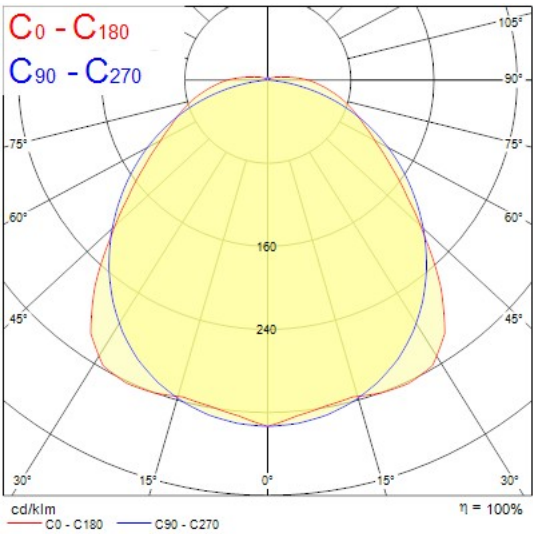

Technical drawings

