



Features

- Compact and elegant design Suitable replacement for halogen, incandescent and compact fluorescent candle lamps Instant light at the flick of a switch Uniform light distribution Good colour rendering (CRI 80) Perfect for hotels, restaurants, lobbies, corridors, stairwells, reception areas Lower maintenance costs 15,000 hours average rated life



Product Overview

|                                   |                                     |
|-----------------------------------|-------------------------------------|
| Product name                      | ToLEDo Candle V7 806LM 840 E14 SL   |
| Technology                        | LED                                 |
| Watt (Rated) (W)                  | 6.5                                 |
| Cap/Base                          | E14                                 |
| Fixture rating                    | Open                                |
| General application               | Hospitality, Residential & Consumer |
| ETIM Class                        | EC001959                            |
| E-number FI                       | 4741003                             |
| Correlated colour temperature (k) | 4000                                |
| Light colour                      | Cool White                          |
| CRI (Ra)                          | 80                                  |
| Colour Variation Initial (SDCM)   | 6                                   |
| Photobiological Risk Group        | RG0                                 |
| Wattage (W)                       | 6.5                                 |
| Power consumption (W)             | 6.5                                 |
| Dimmable                          | No                                  |
| Average life (Nominal) (h)        | 15000                               |
| Product EAN number                | 5410288296159                       |

ToLEDo Candle V7 806LM 840 E14 SL  
0029615

|                             |         |
|-----------------------------|---------|
| Warranty                    | 3 years |
| Useful luminous flux (#use) | 806     |

Technical drawings

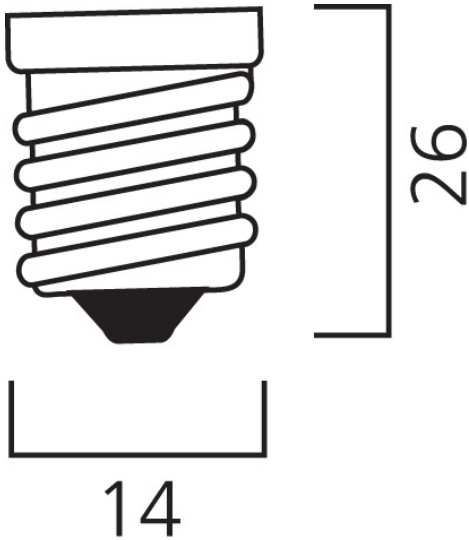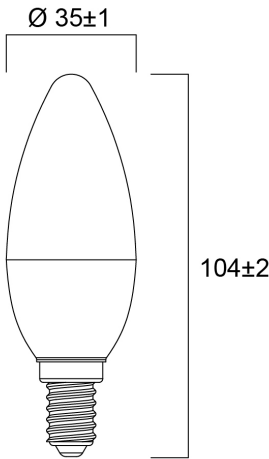

Data table

GENERAL DATA

|                                         |                                     |
|-----------------------------------------|-------------------------------------|
| Product name                            | ToLEDo Candle V7 806LM 840 E14 SL   |
| Technology                              | LED                                 |
| Watt (Rated) (W)                        | 6.5                                 |
| Cap/Base                                | E14                                 |
| Fixture rating                          | Open                                |
| General application                     | Hospitality, Residential & Consumer |
| Operating temperature range (°C)        | -20°C...+40°C                       |
| Performance ambient temperature Tq (°C) | 25                                  |
| ETIM Class                              | EC001959                            |
| E-number FI                             | 4741003                             |

## ToLEDo Candle V7 806LM 840 E14 SL 0029615

|          |         |
|----------|---------|
| Warranty | 3 years |
|----------|---------|

### OPTICAL DATA

|                                              |            |
|----------------------------------------------|------------|
| Useful luminous flux (#use)                  | 806        |
| Luminous flux (Rated) (lm)                   | 806        |
| Correlated colour temperature (k)            | 4000       |
| Light colour                                 | Cool White |
| CRI (Ra)                                     | 80         |
| Colour Variation Initial (SDCM)              | 6          |
| Photobiological Risk Group                   | RG0        |
| Lumen maintenance at end of nominal life (%) | 70         |

### ELECTRICAL DATA

|                                                   |         |
|---------------------------------------------------|---------|
| Power consumption (W)                             | 6.5     |
| Wattage (W)                                       | 6.5     |
| Equivalent watt (W)                               | 60      |
| Primary Supply/Product voltage - min (V)          | 220     |
| Primary Supply/Product voltage - max (V)          | 240     |
| Control gear required                             | No      |
| No. Of switching cycles before premature failures | >100000 |
| Dimmable                                          | No      |
| Inrush Current (A)                                | 2.8     |
| Inrush Duration (µs)                              | 380     |
| Lamp Energy Label (class)                         | E       |
| Nominal Frequency (Hz)                            | 50/60Hz |
| Max. products per 16A C Breaker                   | 57      |
| Max. products per 16A B Breaker                   | 29      |

### LIFETIME DATA

|                            |       |
|----------------------------|-------|
| Lifespan L70 B50           | 15000 |
| Average life (Nominal) (h) | 15000 |
| Average life (Rated) (h)   | 15000 |



ToLEDo Candle V7 806LM 840 E14 SL  
0029615

PHYSICAL DATA

|                               |       |
|-------------------------------|-------|
| Nominal Product Length (mm)   | 104   |
| Nominal Product Diameter (mm) | 35    |
| Weight (kg)                   | 0.018 |

PACKAGING


|                                       |                |
|---------------------------------------|----------------|
| Product EAN number                    | 5410288296159  |
| Packaging single length / height (cm) | 4.5            |
| Packaging single width (cm)           | 4.5            |
| Packaging single depth (cm)           | 11.0           |
| DUN14 (inner)                         | 15410288296156 |
| Units per outer package               | 6              |
| Packaging outer length / height (cm)  | 14.3           |
| Packaging outer width (cm)            | 9.7            |
| Packaging outer depth (cm)            | 12.0           |

SAFETY DATA

|                                     |                                            |
|-------------------------------------|--------------------------------------------|
| Optimal operating condition (°C)    | -20-40                                     |
| Breakage cleaning instructions      | Not applicable                             |
| Special purpose lamp                | No                                         |
| Dry applications use only           | Yes                                        |
| Suitable for household illumination | Yes                                        |
| Safety message                      | Not Suitable for totally enclosed fixtures |

Energy label

**ENERGY**  
**SYLVANIA**  
0029615

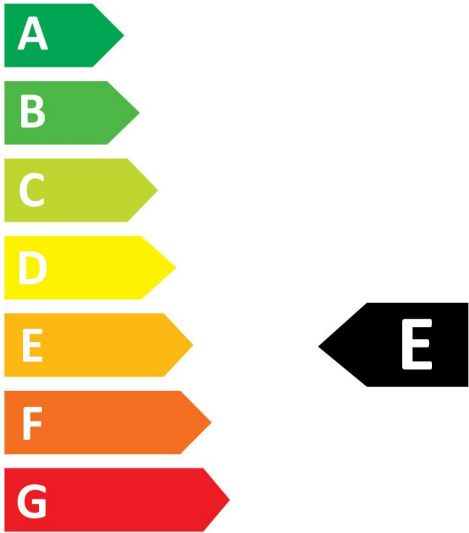


**7**  
kWh/1000h



2019/2015

**ENERGY**  
**SYLVANIA**  
0029615

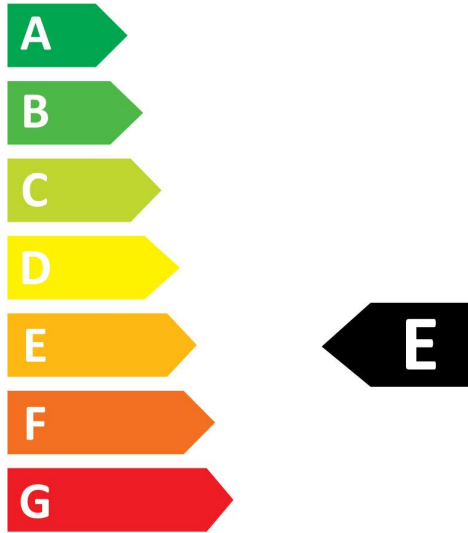

**7**  
kWh/1000h



2019/2015