



START Downlight Eco 215 2400lm 840 Surface
0055198

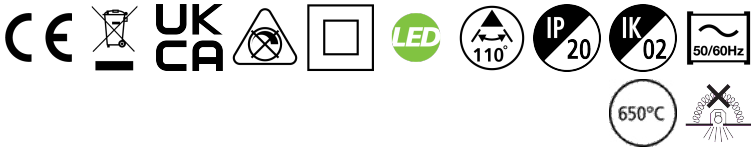

Features

- START Downlight Eco is an integrated LED surface mounted downlight with built-in non dimmable driver; 24W; 2400Lm; 100Lm/W; 4000K.


Product Overview

Product name	START Downlight Eco 215 2400lm 840 Surface
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
General application	Hospitality, Retail
ETIM Class	EC001744
Fixture luminous flux (lm)	2400
Luminaire efficacy (lm/W)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	110
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	24
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No

START Downlight Eco 215 2400lm 840 Surface
0055198


LED Flickering Rate	Medium (21% - 40%)
Housing colour	RAL9003
IP rating	IP20
IK rating	IK02
Product EAN number	5410288551982
Warranty	3 years
Dimming method	N/A

Photometry

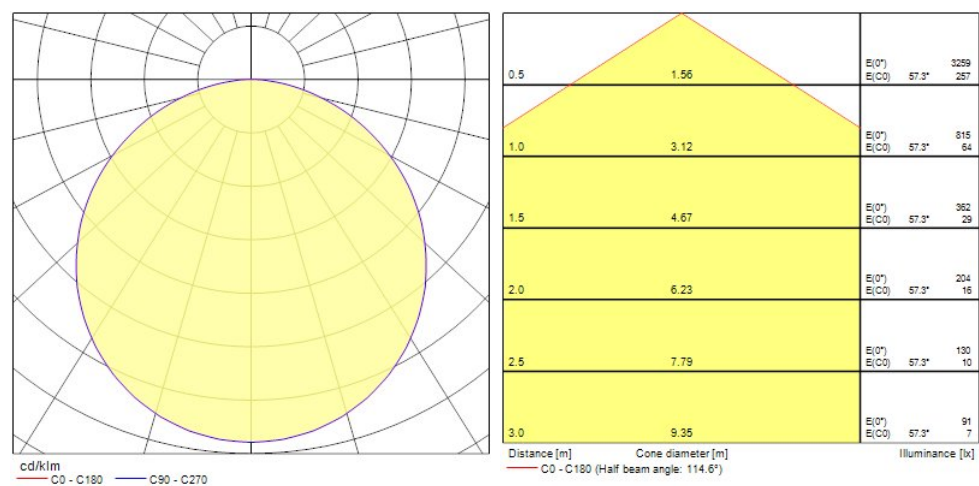

START Downlight Eco 215 2400lm 840 Surface
0055198

Technical drawings

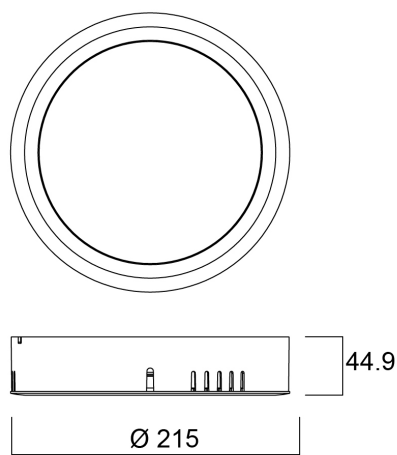

Data table

GENERAL DATA

Product name	START Downlight Eco 215 2400lm 840 Surface
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
General application	Hospitality, Retail
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Warranty	3 years

OPTICAL DATA

Fixture luminous flux (lm)	2400
Luminaire efficacy (lm/W)	100
Correlated colour temperature (k)	4000

START Downlight Eco 215 2400lm 840 Surface 0055198

Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	110
Distribution type	Symmetric
Glare control	< 28
Photobiological Risk Group	RG0

ELECTRICAL DATA

Total power consumption (W)	24
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.5
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	115.0
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	173
Inrush Current (A)	14
Inrush Duration (µs)	250
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Medium (21% - 40%)
Max. products per 10A C Breaker	40
Max. products per 13A C Breaker	53
Max. products per 16A C Breaker	66
Max. products per 20A C Breaker	83
Max. products per 10A B Breaker	23
Max. products per 13A B Breaker	31
Max. products per 16A B Breaker	39
Max. products per 20A B Breaker	49

START Downlight Eco 215 2400lm 840 Surface 0055198

Connectable conductor cross section - Min (mm ²)	0.75
---	------

Connectable conductor cross section - Max (mm ²)	1.5
---	-----

LIFETIME DATA

Lifespan L70 B50	30000
------------------	-------

PHYSICAL DATA

Housing colour	RAL9003
----------------	---------

IP rating	IP20
-----------	------

IK rating	IK02
-----------	------

Diffuser finish	Opal
-----------------	------

Diffuser material	PC Polycarbonate
-------------------	------------------

Reflector finish	Not Applicable
------------------	----------------

Nominal Product Height (mm)	34
-----------------------------	----

Nominal Product Diameter (mm)	215
-------------------------------	-----

Weight (kg)	0.42
-------------	------

PACKAGING

Product EAN number	5410288551982
--------------------	---------------

Packaging single length / height (cm)	21.8
---------------------------------------	------

Packaging single width (cm)	4.8
-----------------------------	-----

Packaging single depth (cm)	22.0
-----------------------------	------

DUN14 (inner)	15410288551989
---------------	----------------

Units per outer package	8
-------------------------	---

Packaging outer length / height (cm)	45.0
--------------------------------------	------

Packaging outer width (cm)	23.0
----------------------------	------

Packaging outer depth (cm)	21.5
----------------------------	------

SAFETY DATA

Glow Wire Test (°C)	650
---------------------	-----

Optimal operating condition (°C)	-20-40
----------------------------------	--------



START Downlight Eco 215 2400lm 840 Surface
0055198

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No