

Start Flood IP65 PIR 5000LM 840 Black
0050170



Features


- The streamlined, durable, lightweight die-cast aluminium body makes Start Flood IP65 a perfect choice for building facades, car parks, garages and construction areas. The product includes 1 m pre-wired stripped cable and fitting bracket for quick and easy installation and the universal mounting bracket allows wall or surface mounting with the possibility of vertical tilting. Black (RAL9017) housing, white reflector, 5000 lm, 43 W, 116 lm/W, 4000K, non dimmable, CRI>80, IP65, IK06, Class I, lifespan L70:B50: 120000 hrs, 201 x 156 x 57 mm (L x W x H). Weight: 0.515 kg. IK05 rated PIR sensor included, which is tiltable for better adjustment of detection areas.

Product Overview

Cap/Base	N/A
Control gear type	Not required

Start Flood IP65 PIR 5000LM 840 Black
0050170

Photometry

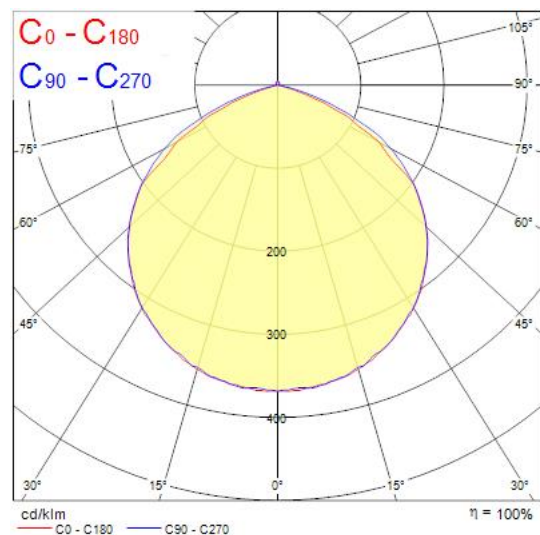

Technical drawings

