



Features

- Logistics and Industry high bay luminaire with wide optics to provide homogenous light distribution for open space areas. 9300lumens, 54W, 172lm/W, 4000K, CRI80, wide beam optic. Fitted with a high bay PIR for 360° detection up to 16m range at 15m mounting height. 3 step MacAdam ellipse, grey finish (RAL7012), Class 1, 220-240V, IP65, IK06 (sensor IK03).


Product Overview

Product name	KUBIXX 4000K 9KLM WIDE PIR
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Suspended
Fixture rating	Enclosed
General application	Logistics & Industry
ETIM Class	EC001716
Fixture luminous flux (lm)	9300
Luminaire efficacy (lm/W)	172
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Glare control	< 22
Photobiological Risk Group	RG1
Total power consumption (W)	54
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Housing colour	Grey


KUBIXX 4000K 9KLM WIDE PIR
0062131

IP rating	IP65
IK rating	IK06
Product EAN number	5410288621319
Warranty	5 years
Dimming method	DALI-2

Photometry

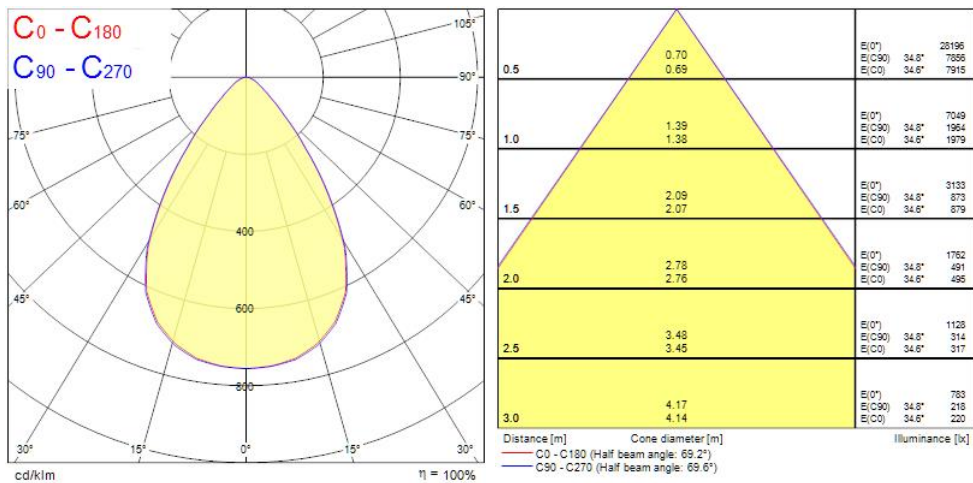

Technical drawings

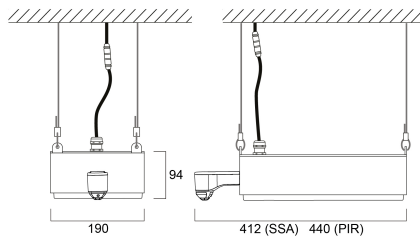

Data table

GENERAL DATA	
Product name	KUBIXX 4000K 9KLM WIDE PIR

KUBIXX 4000K 9KLM WIDE PIR 0062131

Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Suspended
Fixture rating	Enclosed
General application	Logistics & Industry
Operating temperature range (°C)	-40°C...+40°C
ETIM Class	EC001716
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	9300
Luminaire efficacy (lm/W)	172
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Glare control	< 22
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	54
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI-2
Drive current (mA)	770
Inrush Current (A)	41.6
Inrush Duration (µs)	238
Energy Efficiency Class (A->G) of contained light source	B
Nominal Frequency (Hz)	50/60Hz

KUBIXX 4000K 9KLM WIDE PIR 0062131

Max. products per 10A C Breaker	10
Max. products per 13A C Breaker	13
Max. products per 16A C Breaker	17
Max. products per 20A C Breaker	22
Max. products per 10A B Breaker	6
Max. products per 13A B Breaker	8
Max. products per 16A B Breaker	10
Max. products per 20A B Breaker	13

LIFETIME DATA

Lifespan L70 B50	120000
Lifespan L80 B20	95000
Lifespan L90 B10	45000

PHYSICAL DATA

Housing colour	Grey
IP rating	IP65
IK rating	IK06
Diffuser material	PC Polycarbonate
Reflector finish	Not Applicable
Nominal Product Length (mm)	440
Nominal Product Width (mm)	190
Nominal Product Height (mm)	94
Weight (kg)	3.0

PACKAGING

Product EAN number	5410288621319
Packaging single length / height (cm)	48.0
Packaging single width (cm)	23.0
Packaging single depth (cm)	26.0
DUN14 (inner)	05410288621319
Units per outer package	1
Packaging outer length / height (cm)	48.0
Packaging outer width (cm)	23.0



KUBIXX 4000K 9KLM WIDE PIR
0062131

Packaging outer depth (cm)	26.0
----------------------------	------

SAFETY DATA

Glow Wire Test (°C)	850
Optimal operating condition (°C)	-40-40
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No