


Quantum IP54 1200x300 Multipower 4300lm 830
0044660

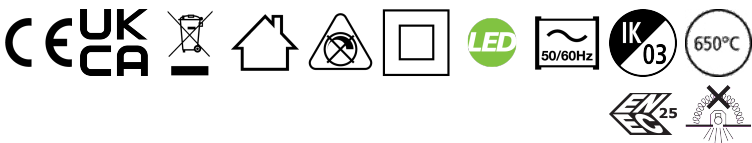

Features

• Quantum is a range of recessed integrated LED panels for general indoor lighting applications such as breakout areas, offices and meeting rooms. With the help of DIP Switch multiple lumen outputs can be set up in 4 steps (22W 3200lm, 24W 3550lm, 26W 3900lm, 28W 4300lm). Max. drive current: 600mA; Lifespan: 120.000Hrs L70:B50; 3000K; CRI 80; Efficacy up to: 154Lm/W; Glare control <19; IK03; IP54 (from the front); Class II; Tp(a) rated diffuser that self-extinguishes within 5 sec when a flame has been removed.


Product Overview

Product name	Quantum IP54 1200x300 Multipower 4300lm 830
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
General application	Office, Education
ETIM Class	EC002892
E-number FI	4279429
Fixture luminous flux (lm)	4300
Luminaire efficacy (lm/W)	154
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	85
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	28

Quantum IP54 1200x300 Multipower 4300lm 830
0044660

Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9003
IP rating	IP54/20
IK rating	IK03
Product EAN number	5410288446608
Warranty	5 years
Dimming method	N/A
Useful luminous flux (#use)	4300

Photometry

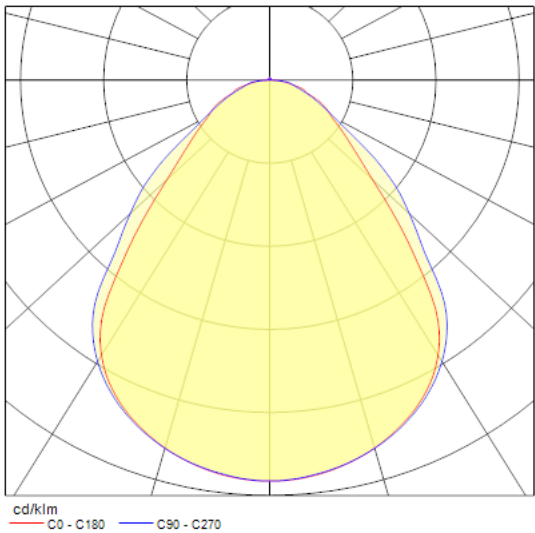

Technical drawings

