



Features

- 5 metre IP67 LED reel with pre-attached 3M adhesive type; 24V; RGBW; White colour 2700K


Product Overview


Product name	START FLEX IP67 RGBW
Technology	LED
Mount	Other
General application	Hospitality, Retail
ETIM Class	EC002706
E-number FI	4276990
Fixture luminous flux (lm)	3250
Luminaire efficacy (lm/W)	45
Correlated colour temperature (k)	2700
CRI (Ra)	50
Colour Variation Initial (SDCM)	3
Beam Angle (°)	120
Beam Angle (°)	N/A
Photobiological Risk Group	RG1
Power consumption (W)	72
Total power consumption (W)	72
Electrical protection	Class III
Dimmable	Yes
Housing colour	Transparent
IP rating	IP67
IK rating	IK00
Product EAN number	5410288681245

START FLEX IP67 RGBW
0068124

Warranty	3 years
Dimming method	Other
Useful luminous flux (#use)	3250

Photometry

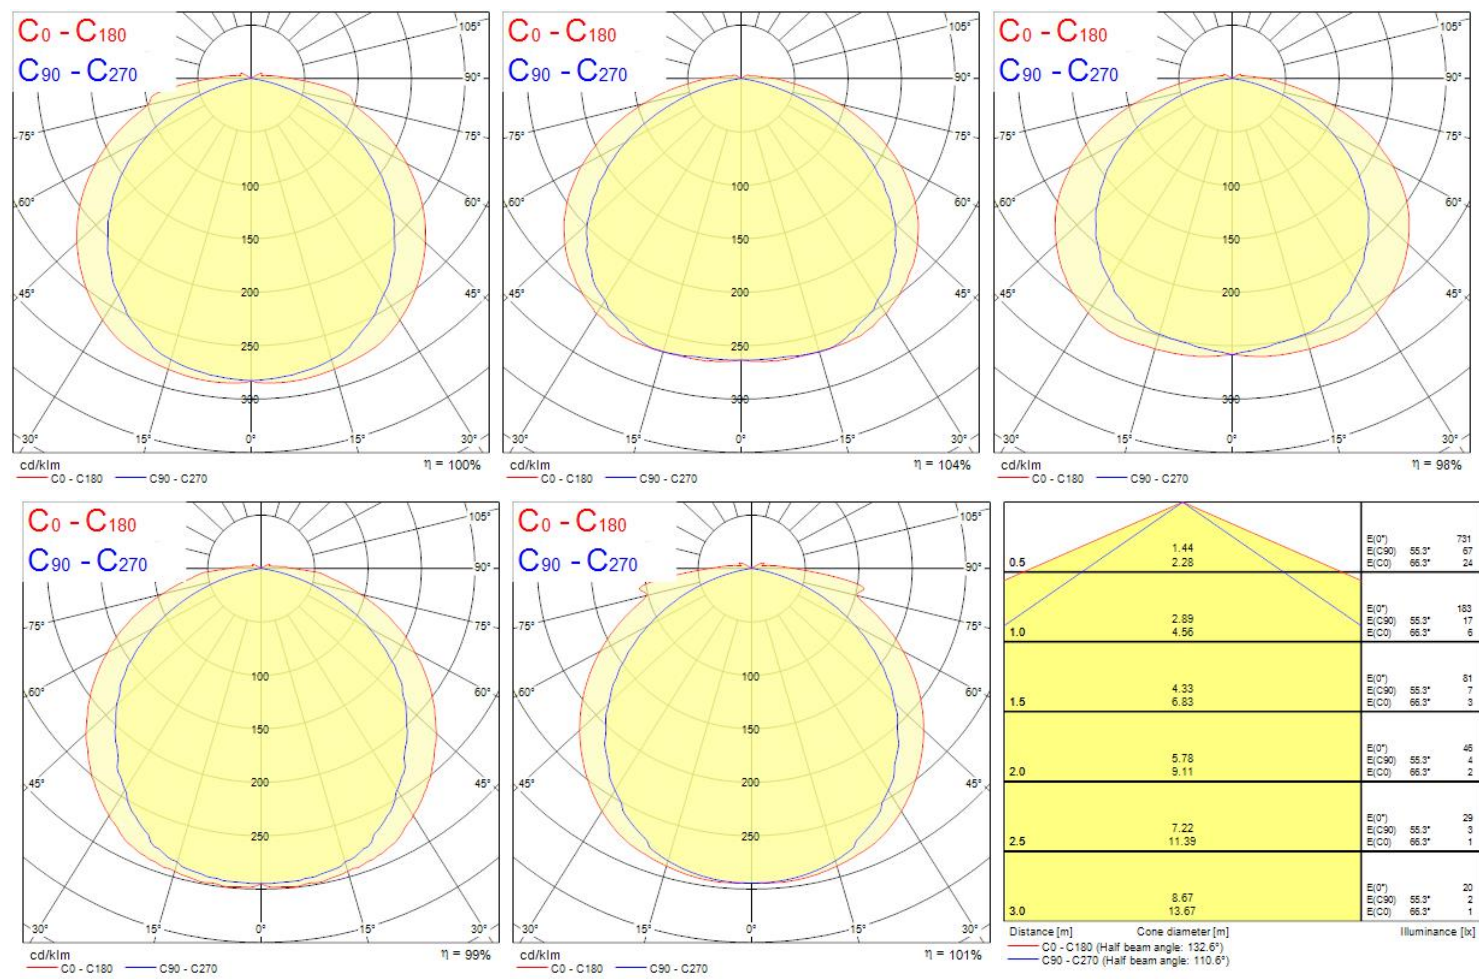

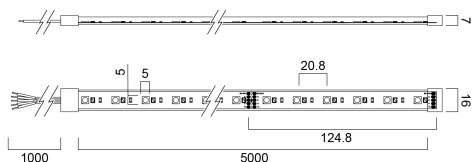

Data table

START FLEX IP67 RGBW 0068124

GENERAL DATA

Product name	START FLEX IP67 RGBW
Technology	LED
Mount	Other
General application	Hospitality, Retail
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002706
E-number FI	4276990
Warranty	3 years

OPTICAL DATA

Useful luminous flux (#use)	3250
Fixture luminous flux (lm)	3250
Luminaire efficacy (lm/W)	45
Correlated colour temperature (k)	2700
CRI (Ra)	50
Colour Variation Initial (SDCM)	3
Beam Angle (°)	120
Beam Angle (°)	N/A
Photobiological Risk Group	RG1

ELECTRICAL DATA

Power consumption (W)	72
Total power consumption (W)	72
Primary Supply/Product voltage - min (V)	24
Primary Supply/Product voltage - max (V)	24
Electrical protection	Class III
Control gear required	Yes
Dimmable	Yes
Dimming method	Other
Drive current (mA)	3000

START FLEX IP67 RGBW 0068124

Lamp Energy Label (class)	G
---------------------------	---

LIFETIME DATA

Lifespan L70 B50	30000
Lifespan L70 B10	30000
Lifespan L80 B10	30000
Lifespan L90 B10	30000

PHYSICAL DATA

Housing colour	Transparent
IP rating	IP67
IK rating	IK00
Nominal Product Length (mm)	5000
Nominal Product Width (mm)	14.2
Nominal Product Height (mm)	5.4
Weight (kg)	0.35

PACKAGING

Product EAN number	5410288681245
Packaging single length / height (cm)	29.5
Packaging single width (cm)	27.5
Packaging single depth (cm)	3.0
DUN14 (inner)	15410288681242
Units per outer package	20
Packaging outer length / height (cm)	56.5
Packaging outer width (cm)	32.0
Packaging outer depth (cm)	31.5

SAFETY DATA

Glow Wire Test (°C)	650
Optimal operating condition (°C)	-20-40
Special purpose lamp	No
Dry applications use only	No

START FLEX IP67 RGBW
0068124


Suitable for household illumination No

Energy label

 **ENERG** 

SYLVANIA

0068124

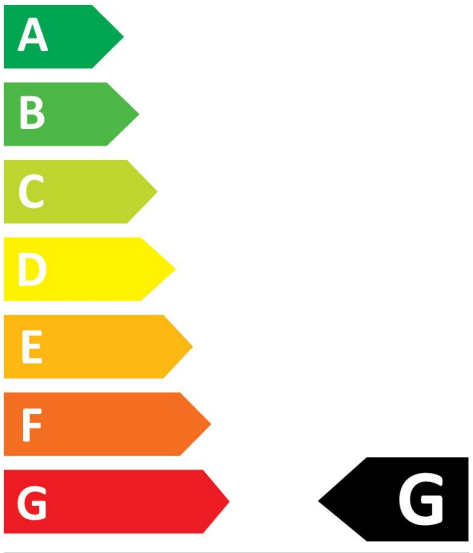

72
kWh/1000h




2019/2015

 **ENERG** 

SYLVANIA

0068124

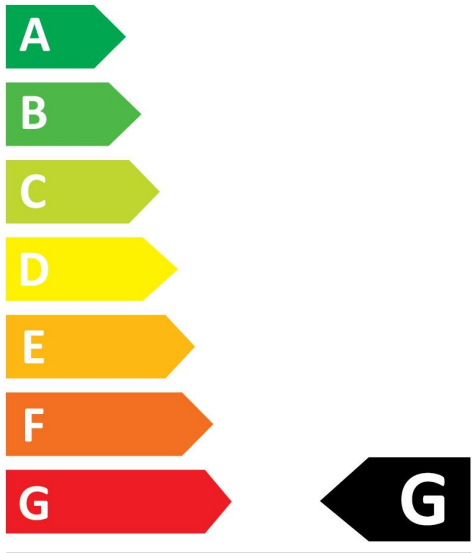

72
kWh/1000h



2019/2015