

Features

- LED exterior surface mounted luminaire, 1150lm, 12W power consumption, 96lm/W efficacy, 3000K color temperature, CRI80, non-dimmable, IP66, IK10, 90,000 hours (L70B50) Lifespan, white housing, vandal resistant, supplied with anti-theft screws


Product Overview

Product name	START SURFACE IP66 1150LM 830 IK10 WHT
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
Environment	Indoor, Outdoor
General application	Hospitality
ETIM Class	EC002892
E-number FI	4579599
Fixture luminous flux (lm)	1150
Luminaire efficacy (lm/W)	96
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Photobiological Risk Group	RG0
Total power consumption (W)	12
Electrical protection	Class II
Control gear type	LED driver constant current
Housing colour	RAL9003

START SURFACE IP66 1150LM 830 IK10 WHT 0049928

IP rating	IP66
IK rating	IK10
Product EAN number	5410288499284
Warranty	5 years
Dimming method	N/A
Useful luminous flux (#use)	1150

Photometry

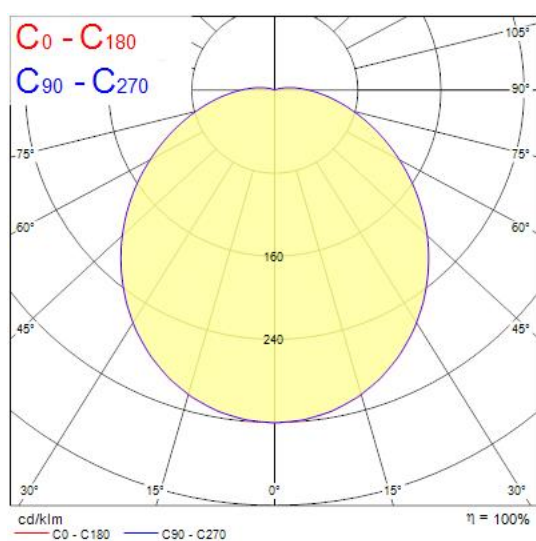

Technical drawings

