

INSTAR TREND SW IP44 INDOOR WH
3079060



Features

- INSTAR TREND SW IP44 INDOOR WH





Product Overview

Product name	INSTAR TREND SW IP44 INDOOR WH
Technology	Accessory
Cap/Base	GX5.3
Housing	Aluminium
Mount	Ceiling recessed mounting
Light source included	Fixture without Lightsource
Environment	Indoor
General application	Hospitality, Residential & Consumer
ETIM Class	EC001744
E-number FI	4274923
E-number SE	7461923
E-number Norway	3223415
LOR (%)	Dependent on lamp
Electrical protection	Class III
Control gear mounting	Remote
Housing colour	White
IP rating	IP44/20
IK rating	IK02
Product EAN number	8711971790600
Warranty	3 years

INSTAR TREND SW IP44 INDOOR WH
3079060

Photometry

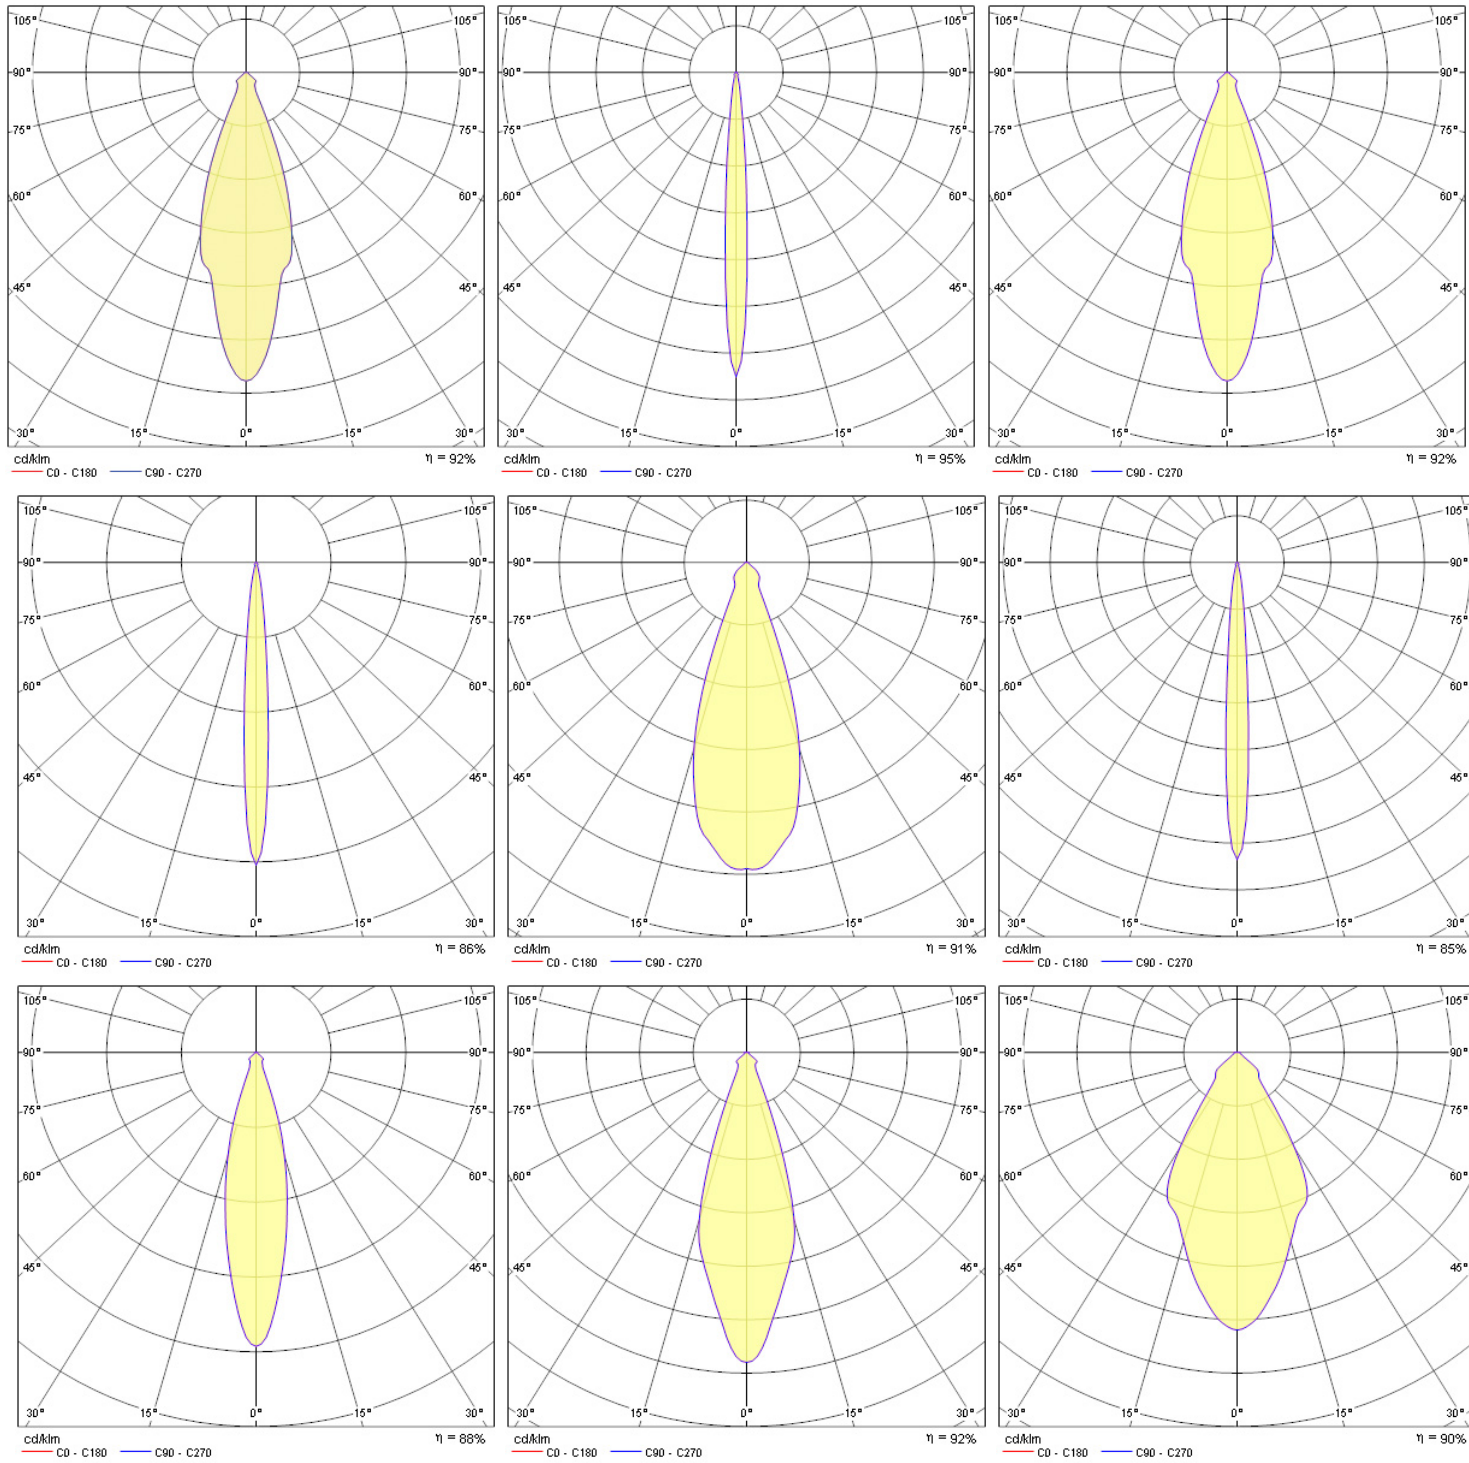

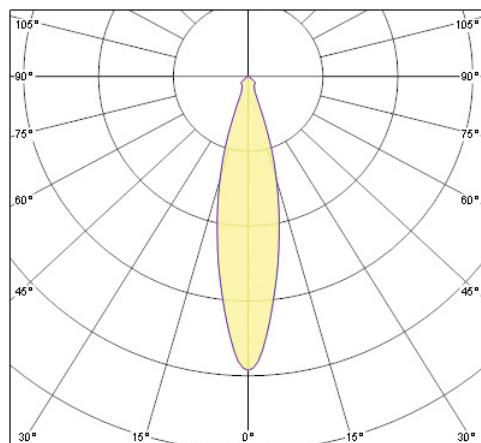

0.5	0.32	$E(0^\circ)$ 6104 $E(C_0)$ 18.0° 2223
1.0	0.65	$E(0^\circ)$ 1276 $E(C_0)$ 18.0° 566
1.5	0.97	$E(0^\circ)$ 967 $E(C_0)$ 18.0° 247
2.0	1.30	$E(0^\circ)$ 319 $E(C_0)$ 18.0° 139
2.5	1.62	$E(0^\circ)$ 204 $E(C_0)$ 18.0° 89
3.0	1.95	$E(0^\circ)$ 142 $E(C_0)$ 18.0° 62

Distance [m] Cone diameter [m] Illuminance [lx]


— C_0 - C_{180} (Half beam angle: 36.0°)

Distance [m]	Cone diameter [m]	$E(0^\circ)$ $E(C_0)$	2566 1306
0.5	0.30	16.8°	326
1.0	0.60	16.8°	739
1.5	0.91	16.8°	328
2.0	1.21	16.8°	145
2.5	1.51	16.8°	82
3.0	1.81	16.8°	36

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 33.6°)

INSTAR TREND SW IP44 INDOOR WH
3079060

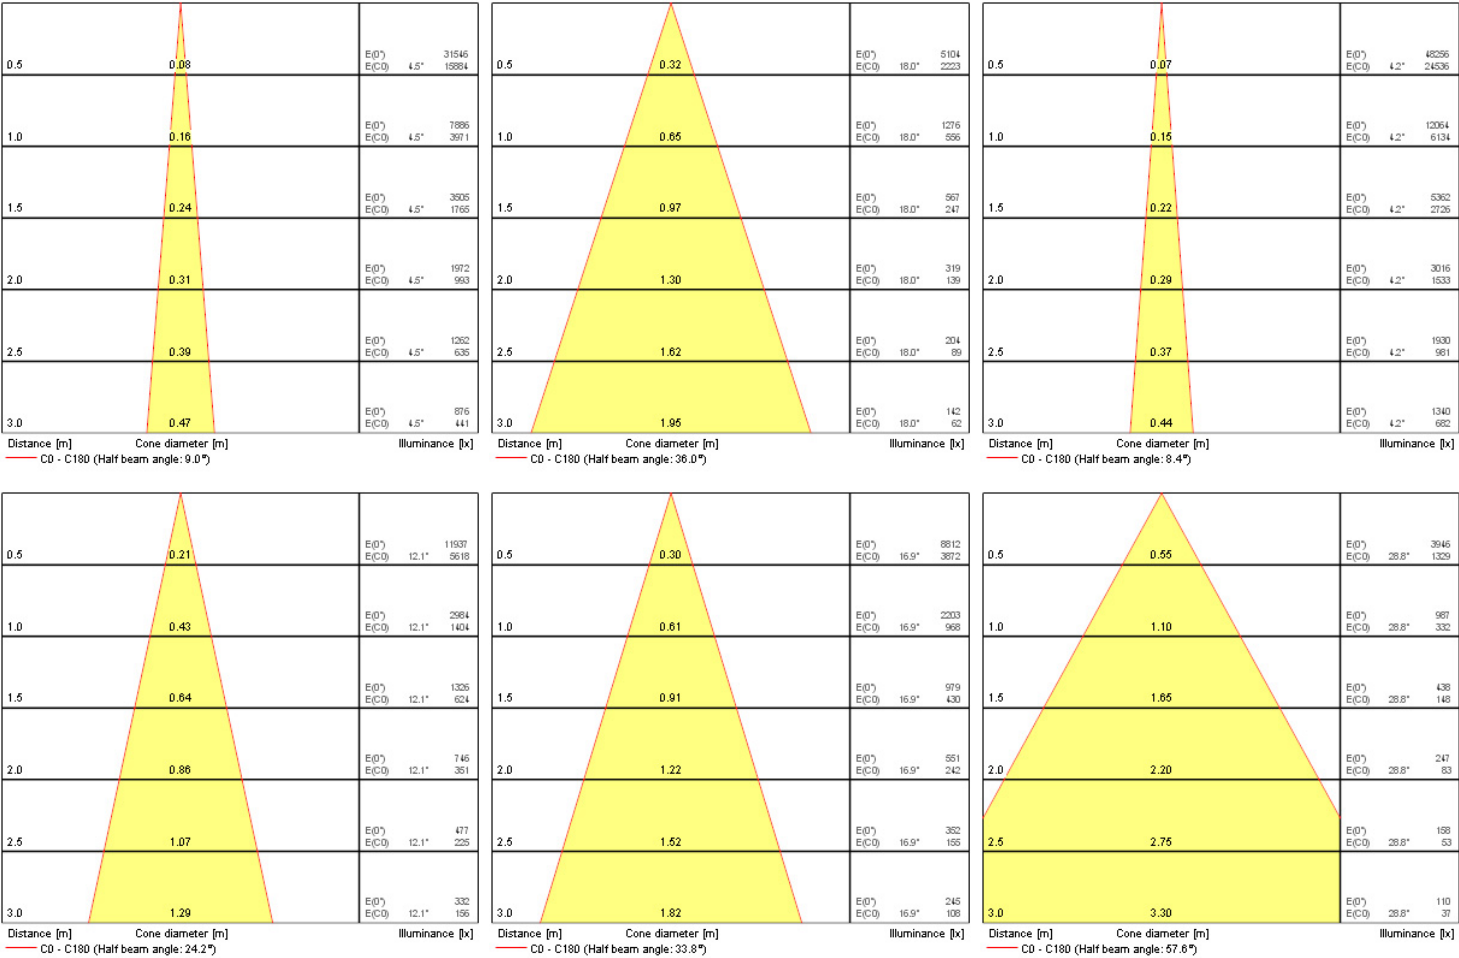

Data table

GENERAL DATA

Product name	INSTAR TREND SW IP44 INDOOR WH
Technology	Accessory
Cap/Base	GX5.3
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Indoor
General application	Hospitality, Residential & Consumer

INSTAR TREND SW IP44 INDOOR WH 3079060

ETIM Class	EC001744
E-number FI	4274923
E-number SE	7461923
E-number Norway	3223415
Warranty	3 years

OPTICAL DATA

LOR (%)	Dependent on lamp
Adjustable chromaticity	N
Distribution type	Adjustable

ELECTRICAL DATA

Light source included	Fixture without Lightsource
Primary Supply/Product voltage - min (V)	12
Primary Supply/Product voltage - max (V)	12
Electrical protection	Class III
Control gear required	No
Control gear mounting	Remote
Nominal Frequency (Hz)	50/60Hz

PHYSICAL DATA

Housing colour	White
IP rating	IP44/20
IK rating	IK02
Max. Lamp Diameter (mm) - D	95
Weight (kg)	0.164
Recessed Depth (mm)	90

PACKAGING

Product EAN number	8711971790600
Packaging single length / height (cm)	13.2
Packaging single width (cm)	10.0
Packaging single depth (cm)	8.4



INSTAR TREND SW IP44 INDOOR WH
3079060

DUN14 (inner)	18711971790607
Units per outer package	30
Packaging outer length / height (cm)	28.4
Packaging outer width (cm)	28.5
Packaging outer depth (cm)	53.2

SAFETY DATA

Glow Wire Test (°C)	850
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No