



Features

- Surface or Suspended LED luminaire with Micro Prismatic Optic, Direct Light Distribution, Luminaire Dimensions: 1447x187x56mm, White body colour, IP20, IK07, DALI Dimmable, Emergency 3 hours, Low LED flicker (+/-5%), Warm White (3000K) LED Colour Temperature, 4400lm, 39W, 112lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, UGR<18, Luminance at 65° < 3000 cd/m2, Lifespan: 96,000 hours L80B20, Quick electrical connection with push-connectors in the luminaire, Glow Wire Test 850°C.


Product Overview

|                                   |                                             |
|-----------------------------------|---------------------------------------------|
| Product name                      | RANA NEO 4300LM S 1500 830 DALI EM 1L WHITE |
| Technology                        | LED (3 SDCM)                                |
| Cap/Base                          | N/A                                         |
| Housing                           | Steel                                       |
| Mount                             | Ceiling surface mounting, Suspended         |
| General application               | Education, Office                           |
| ETIM Class                        | EC002892                                    |
| Fixture luminous flux (lm)        | 4400                                        |
| Luminaire efficacy (lm/W)         | 113                                         |
| Correlated colour temperature (k) | 3000                                        |
| Light colour                      | Warm White                                  |
| CRI (Ra)                          | 80                                          |
| Colour Variation Initial (SDCM)   | 3                                           |
| Glare control                     | < 18                                        |
| Photobiological Risk Group        | RG0                                         |
| Luminous flux (emergency) (lm)    | 80                                          |
| Total power consumption (W)       | 39                                          |
| Electrical protection             | Class I                                     |

RANA NEO 4300LM S 1500 830 DALI EM 1L WHITE  
0054254


|                     |                             |
|---------------------|-----------------------------|
| Control gear type   | LED driver constant current |
| Dimmable            | Yes                         |
| LED Flickering Rate | Ultra low (5% or less)      |
| Housing colour      | RAL9016                     |
| IP rating           | IP20                        |
| IK rating           | IK07                        |
| Product EAN number  | 5410288542546               |
| Warranty            | 5 years                     |
| Dimming method      | DALI                        |

Photometry

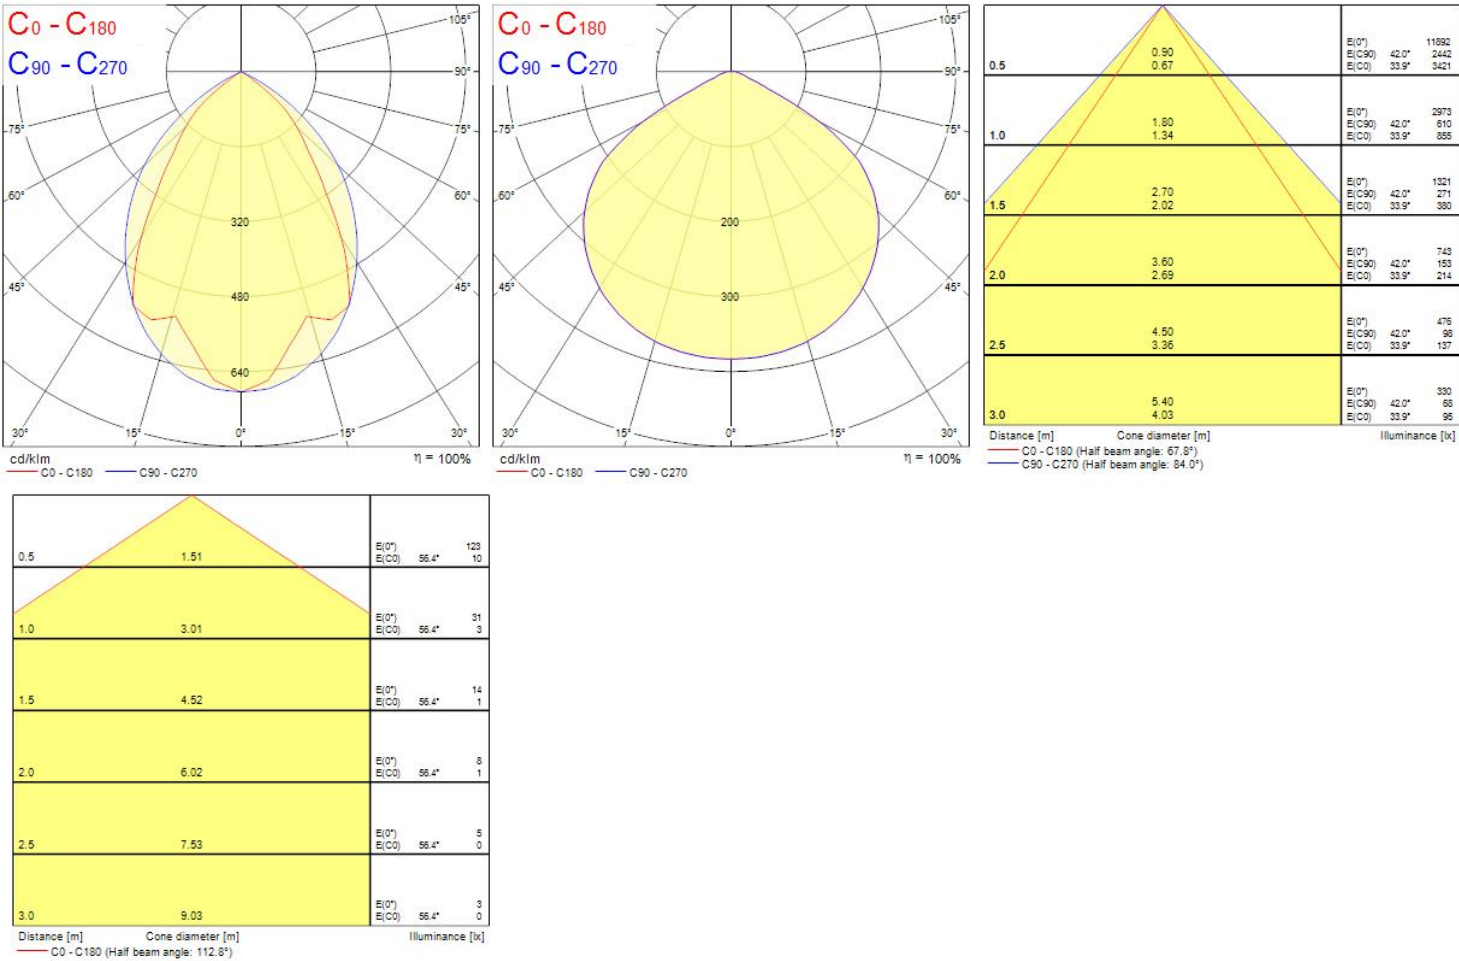

RANA NEO 4300LM S 1500 830 DALI EM 1L WHITE  
0054254

Technical drawings

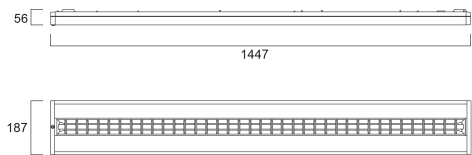

Data table

GENERAL DATA

|                                         |                                             |
|-----------------------------------------|---------------------------------------------|
| Product name                            | RANA NEO 4300LM S 1500 830 DALI EM 1L WHITE |
| Technology                              | LED (3 SDCM)                                |
| Cap/Base                                | N/A                                         |
| Housing                                 | Steel                                       |
| Mount                                   | Ceiling surface mounting, Suspended         |
| General application                     | Education, Office                           |
| Operating temperature range (°C)        | 0°C...+25°C                                 |
| Performance ambient temperature Tq (°C) | 25                                          |
| ETIM Class                              | EC002892                                    |
| Warranty                                | 5 years                                     |

OPTICAL DATA

|                                   |            |
|-----------------------------------|------------|
| Fixture luminous flux (lm)        | 4400       |
| Luminaire efficacy (lm/W)         | 113        |
| Correlated colour temperature (k) | 3000       |
| Light colour                      | Warm White |
| CRI (Ra)                          | 80         |
| Colour Variation Initial (SDCM)   | 3          |
| Glare control                     | < 18       |

## RANA NEO 4300LM S 1500 830 DALI EM 1L WHITE 0054254

|                                |     |
|--------------------------------|-----|
| Photobiological Risk Group     | RG0 |
| Luminous flux (emergency) (lm) | 80  |
| Emergency duration (h)         | 3   |

### ELECTRICAL DATA

|                                                                       |                                |
|-----------------------------------------------------------------------|--------------------------------|
| Total power consumption (W)                                           | 39                             |
| Primary Supply/Product voltage - min (V)                              | 220                            |
| Primary Supply/Product voltage - max (V)                              | 240                            |
| Lamp power factor                                                     | 0.96                           |
| THD (at 230 V, 50 Hz, full load, at 100% dimming level) $\leq$ xx.x % | 9                              |
| Electrical protection                                                 | Class I                        |
| Control gear required                                                 | No                             |
| Control gear type                                                     | LED driver constant current    |
| Dimmable                                                              | Yes                            |
| Dimming method                                                        | DALI                           |
| Drive current (mA)                                                    | 300                            |
| Inrush Current (A)                                                    | 22.4                           |
| Inrush Duration ( $\mu$ s)                                            | 176                            |
| Energy Efficiency Class (A->G) of contained light source              | C, D(more than 1 Light Source) |
| Nominal Frequency (Hz)                                                | 50/60Hz                        |
| LED Flickering Rate                                                   | Ultra low (5% or less)         |
| Max. products per 10A C Breaker                                       | 21                             |
| Max. products per 13A C Breaker                                       | 28                             |
| Max. products per 16A C Breaker                                       | 36                             |
| Max. products per 20A C Breaker                                       | 45                             |
| Max. products per 10A B Breaker                                       | 13                             |
| Max. products per 13A B Breaker                                       | 17                             |
| Max. products per 16A B Breaker                                       | 22                             |
| Max. products per 20A B Breaker                                       | 27                             |

### LIFETIME DATA

|                  |        |
|------------------|--------|
| Lifespan L70 B50 | 100000 |
|------------------|--------|

RANA NEO 4300LM S 1500 830 DALI EM 1L WHITE  
0054254

|                  |       |
|------------------|-------|
| Lifespan L80 B20 | 96000 |
|------------------|-------|

PHYSICAL DATA

|                             |                  |
|-----------------------------|------------------|
| Housing colour              | RAL9016          |
| IP rating                   | IP20             |
| IK rating                   | IK07             |
| Diffuser finish             | Opal             |
| Diffuser material           | PC Polycarbonate |
| Nominal Product Length (mm) | 1440             |
| Nominal Product Width (mm)  | 187              |
| Nominal Product Height (mm) | 47               |
| Weight (kg)                 | 4.2              |

PACKAGING

|                                       |                |
|---------------------------------------|----------------|
| Product EAN number                    | 5410288542546  |
| Packaging single length / height (cm) | 153.5          |
| Packaging single width (cm)           | 6.5            |
| Packaging single depth (cm)           | 21.0           |
| DUN14 (inner)                         | 05410288542546 |
| Units per outer package               | 1              |
| Packaging outer length / height (cm)  | 153.5          |
| Packaging outer width (cm)            | 6.5            |
| Packaging outer depth (cm)            | 21.0           |

SAFETY DATA

|                                     |     |
|-------------------------------------|-----|
| Glow Wire Test (°C)                 | 850 |
| Special purpose lamp                | No  |
| Dry applications use only           | No  |
| Suitable for household illumination | No  |