



Features

• An exquisite glass spiral filament LED lamp with RGB and tuneable white capabilities, providing endless colours and adaptable lighting for every occasion. Same size as traditional lamps, hassle-free upgrade to Smart energy-efficient LED lighting. Transform space with pre-set scenes and sync RGB lights with music for an immersive experience. More than 16 million colour combinations to choose from. Customise lighting from warm cosy to bright daylight (2700-6500K) for the ideal settings. Works effortlessly with SylSmart Home App, SylRemote, Amazon Alexa, Google Assistant and Siri Shortcuts for seamless control and convenience. Adjustable brightness from 1% to 100% with wireless dimming function for perfect illumination. Sparkling light effect.


Product Overview

Product name	ToLEDo Retro GLS 470LM RGBW SST
Technology	LED
Lamp shape	Pear-shape
Cap/Base	E27
Lamp finish	Other
Fixture rating	Open
General application	Hospitality, Residential & Consumer, Retail
ETIM Class	EC001959
E-number FI	4741195
Light colour	RGBW
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG1
Wattage (W)	6.3
Power consumption (W)	6.3

ToLEDo Retro GLS 470LM RGBW SST
0030107

Dimmable	Yes
IP rating	IP20
Product EAN number	5410288301075
Warranty	3 years
Useful luminous flux (#use)	470

Technical drawings

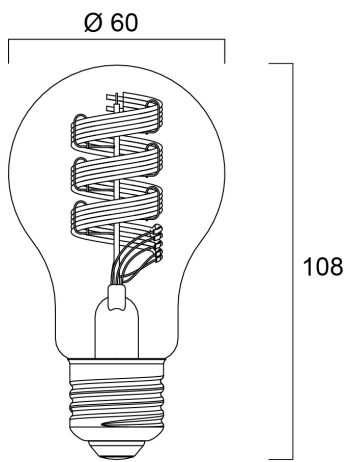

Data table

GENERAL DATA

Product name	ToLEDo Retro GLS 470LM RGBW SST
Technology	LED
Lamp shape	Pear-shape
Cap/Base	E27
Lamp finish	Other
Fixture rating	Open
General application	Hospitality, Residential & Consumer, Retail
Operating temperature range (°C)	-20°C...+40°C
ETIM Class	EC001959
E-number FI	4741195
Warranty	3 years

ToLEDo Retro GLS 470LM RGBW SST 0030107

OPTICAL DATA

Useful luminous flux (#use)	470
Light colour	RGBW
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG1

ELECTRICAL DATA

Power consumption (W)	6.3
Wattage (W)	6.3
Equivalent watt (W)	40
Current (A)	0.045
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Control gear required	No
Dimmable	Yes
Inrush Current (A)	3.6
Inrush Duration (µs)	120
Lamp Energy Label (class)	G
Nominal Frequency (Hz)	50/60Hz

LIFETIME DATA

Lifespan L70 B50	15000
------------------	-------

PHYSICAL DATA

IP rating	IP20
Nominal Product Length (mm)	108
Nominal Product Diameter (mm)	60
Weight (kg)	0.059

PACKAGING

Product EAN number	5410288301075
--------------------	---------------



ToLEDo Retro GLS 470LM RGBW SST
0030107

Packaging single length / height (cm)	6.6
Packaging single width (cm)	6.6
Packaging single depth (cm)	12.0
DUN14 (inner)	15410288301072
Units per outer package	6
Packaging outer length / height (cm)	20.6
Packaging outer width (cm)	13.9
Packaging outer depth (cm)	13.0

SAFETY DATA

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

Energy label



0030107




7
kWh/1000h



2019/2015



0030107

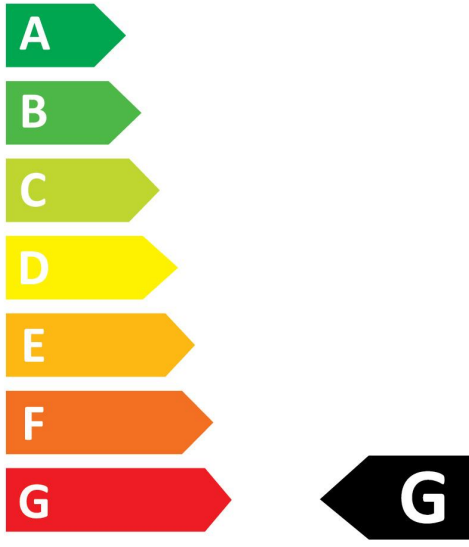

7
kWh/1000h



2019/2015