


OBICO 68 IP65 530lm 3CCT DIM ADJ BRUSHED CHROME
0005365

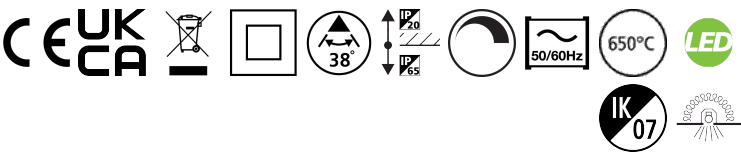

Features

- Integrated LED recessed spotlight, 2-axis adjustable (horizontal rotation 360°, vertical tilt 30°) brushed chrome bezel colour, 3 CCT options of 2700-3000-4000k, lumen up to 550lm, , 5.4W, dimmable trailing/leading edge, 38° degree beam angle, aluminium and steel body, low profile 37mm recessed depth, IP65 frontal degree, IK07, loop-in/loop-out terminals for fast wiring, 68mm cutout, clear lens. Air-proof, to limit air leakage when used in residential applications within the building’s thermal envelope. Directly coverable with insulation material according to EN60598-1

Product Overview


Product name	OBICO 68 IP65 530lm 3CCT DIM ADJ BRUSHED CHROME
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Residential & Consumer
ETIM Class	EC001744
E-number FI	4278507
Fixture luminous flux (lm)	530
Luminaire efficacy (lm/W)	98
Light colour	Cool White
CRI (Ra)	90
Colour Variation Initial (SDCM)	6
Beam Angle (°)	38
Glare control	< 25
Photobiological Risk Group	RG1

OBICO 68 IP65 530lm 3CCT DIM ADJ BRUSHED CHROME

0005365

Total power consumption (W)	5.4
Electrical protection	Class II
Control gear type	LED driver constant current
Housing colour	Chrome
IP rating	IP65/20
IK rating	IK07
Product EAN number	5410288053653
Warranty	5 years
Dimming method	Mains: leading / trailing edge
Useful luminous flux (#use)	530

Photometry

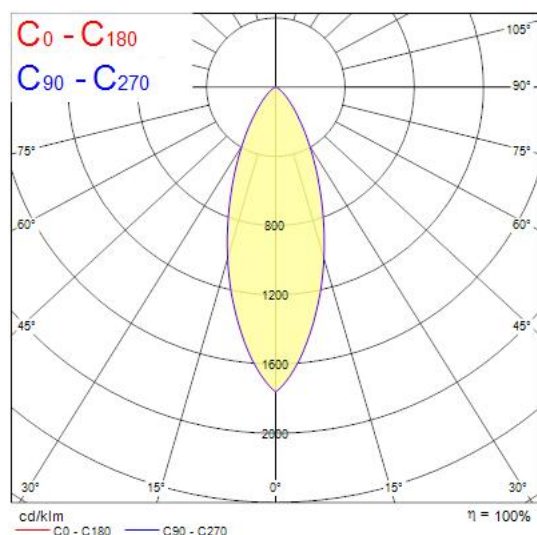

Technical drawings

