



Features

- LED batten, T8 replacement, ease of installation through 2 part push-in design of the housing, Traffic white (RAL9016) iron housing, 4550 - 9200lm (selected by DIP switches), 33 - 68W, 124-152lm/W, Integrated switch allows to choose between warm white (3000K) and neutral white (4000K) colour temperatures, CRI80, 3 step MacAdam ellipse, symmetric wide beam angle, Class I, 120000 hrs L70B50 lifespan, Non-dimmable driver, IK08, IP20, 1800 x 64 x 65mm (LxWxH) dimensions, 1.73kg weight. BESA compatibility. End cap incorporates 20mm conduit knock out.


Product Overview

|                                 |                                       |
|---------------------------------|---------------------------------------|
| Product name                    | Start Batten 1800 5000/9000lm 830/840 |
| Technology                      | LED                                   |
| Cap/Base                        | N/A                                   |
| Housing                         | Steel                                 |
| General application             | Logistics & Industry                  |
| ETIM Class                      | EC000109                              |
| E-number FI                     | 4279485                               |
| Fixture luminous flux (lm)      | 9200                                  |
| Luminaire efficacy (lm/W)       | 135                                   |
| Light colour                    | Warm White or Neutral White           |
| CRI (Ra)                        | 80                                    |
| Colour Variation Initial (SDCM) | 3                                     |
| Beam Angle (°)                  | 145x110                               |
| Photobiological Risk Group      | RG1                                   |
| Total power consumption (W)     | 68                                    |
| Electrical protection           | Class I                               |
| Control gear type               | LED driver constant current           |
| Dimmable                        | No                                    |

Start Batten 1800 5000/9000lm 830/840  
0048980

|                     |                        |
|---------------------|------------------------|
| LED Flickering Rate | Ultra low (5% or less) |
| Housing colour      | RAL9016                |
| IP rating           | IP20                   |
| IK rating           | IK08                   |
| Product EAN number  | 5410288489803          |
| Warranty            | 5 years                |
| Dimming method      | N/A                    |

Photometry

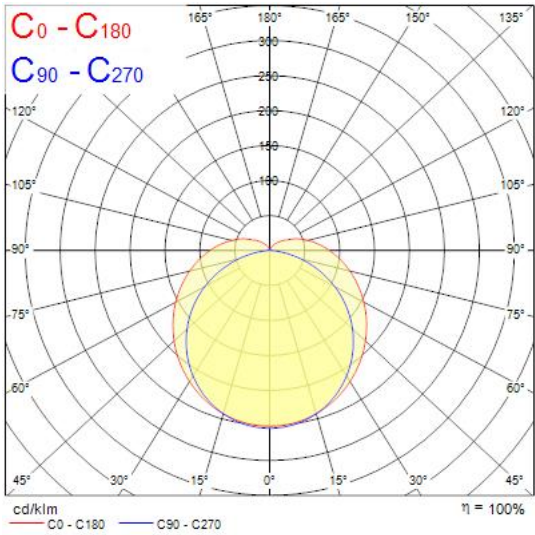

Technical drawings

