

# Concord

Solstice 200 1500lm 930 SSC01D BB  
2070392



## Features

- The Solstice 200 1500lm 930 SSC BBis a high efficient SSC BBdimmable downlight luminaire, Colour rendering index Ra>90, Colour temperature: 3000K Warm White, Class II, Protection rating IP40/IP20, Cut out dimensions: 200mm.

## Product Overview


|                                   |                                   |
|-----------------------------------|-----------------------------------|
| Product name                      | Solstice 200 1500lm 930 SSC01D BB |
| Technology                        | LED                               |
| Cap/Base                          | N/A                               |
| Housing                           | Aluminium                         |
| Mount                             | Ceiling recessed mounting         |
| General application               | Hospitality, Office, Retail       |
| ETIM Class                        | EC001744                          |
| E-number FI                       | 4274606                           |
| Fixture luminous flux (lm)        | 1500                              |
| Luminous flux (lm)                | 1500                              |
| Luminaire efficacy (lm/W)         | 88                                |
| LOR (%)                           | 100                               |
| Correlated colour temperature (k) | 3000                              |
| Light colour                      | Warm White                        |
| CRI (Ra)                          | 90                                |
| Colour Consistency (SDCM)         | 3                                 |
| Colour Variation Initial (SDCM)   | 3                                 |
| Beam Angle (°)                    | 70                                |
| Glare control                     | < 19                              |

# Concord

Solstice 200 1500lm 930 SSC01D BB  
2070392

|                             |                             |
|-----------------------------|-----------------------------|
| Photobiological Risk Group  | RG0                         |
| Total power consumption (W) | 17                          |
| Electrical protection       | Class II                    |
| Control gear type           | LED driver constant current |
| Minimum dimming level (%)   | 1                           |
| LED Flickering Rate         | Ultra low (5% or less)      |
| Housing colour              | RAL9005                     |
| IP rating                   | IP40/20                     |
| IK rating                   | IK02                        |
| Product EAN number          | 5025768703920               |
| Warranty                    | 5 years                     |
| Dimming method              | SylSmart SSC                |
| Useful luminous flux (#use) | 1500                        |

## Photometry

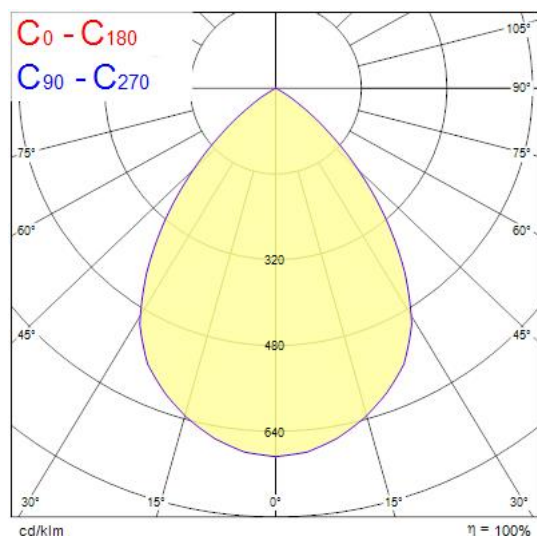

## Technical drawings

