



Features

• Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 4000lm; 26W; 154lm/W; 4000K; SDCM<5; CRI80; IP66; IK08 (sensor IK03); Class I; 69,000hrs (L80B20) lifespan; 1593mm x 87mm x 80mm; D-mark; SylSmart Connected Industry enabled.


Product Overview

|                                   |                                                           |
|-----------------------------------|-----------------------------------------------------------|
| Product name                      | Resisto 1500 HE IP65 4000lm 840 SSE                       |
| Technology                        | LED                                                       |
| Cap/Base                          | N/A                                                       |
| Housing                           | PC Polycarbonate                                          |
| Mount                             | Ceiling surface mounting, Suspended, Wall surface mounted |
| General application               | Logistics & Industry                                      |
| ETIM Class                        | EC002892                                                  |
| Fixture luminous flux (lm)        | 4000                                                      |
| Luminaire efficacy (lm/W)         | 154                                                       |
| Correlated colour temperature (k) | 4000                                                      |
| CRI (Ra)                          | 80                                                        |
| Colour Consistency (SDCM)         | 3                                                         |
| Colour Variation Initial (SDCM)   | 3                                                         |
| Beam Angle (°)                    | 110                                                       |
| Glare control                     | < 23                                                      |
| Photobiological Risk Group        | RG1                                                       |
| Total power consumption (W)       | 26                                                        |
| Electrical protection             | Class I                                                   |

Resisto 1500 HE IP65 4000lm 840 SSE  
0010276

|                           |                             |
|---------------------------|-----------------------------|
| Control gear type         | LED driver constant current |
| Dimmable                  | Yes                         |
| Minimum dimming level (%) | 1                           |
| LED Flickering Rate       | Ultra low (5% or less)      |
| Housing colour            | Grey                        |
| IP rating                 | IP65                        |
| IK rating                 | IK08                        |
| Product EAN number        | 5410288102764               |
| Warranty                  | 5 years                     |
| Dimming method            | SylSmart SSE                |

Photometry

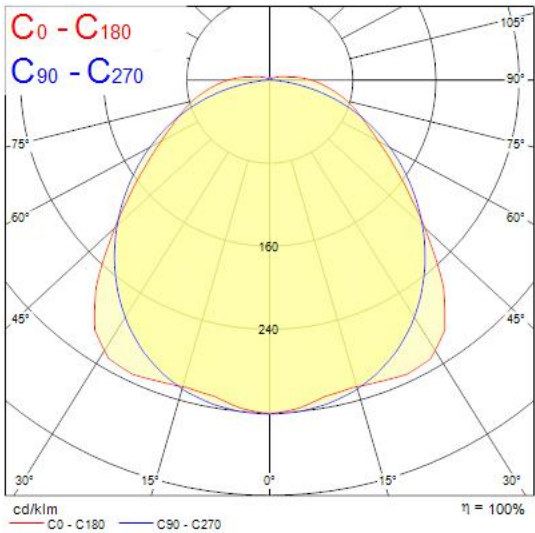

Technical drawings

