

Start Flood IP65 PIR 3000LM 830 Black
0050176



Features

- The streamlined, durable, lightweight die-cast aluminium body makes Start Flood IP65 a perfect choice for building facades, car parks, garages and construction areas. The product includes 1 m pre-wired stripped cable and fitting bracket for quick and easy installation and the universal mounting bracket allows wall or surface mounting with the possibility of vertical tilting. Black (RAL9017) housing, white reflector, 3000 lm, 27 W, 111 lm/W, 3000K, non dimmable, CRI>80, IP65, IK06, Class I, lifespan L70:B50: 90000 hrs, 190 x 125 x 52 mm (L x W x H). Weight: 0.393 kg. IK05 rated PIR sensor included, which is tiltable for better adjustment of detection areas.


Product Overview

Product name	Start Flood IP65 PIR 3000LM 830 Black
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting, Wall surface mounted
General application	Residential & Consumer
ETIM Class	EC001744
Fixture luminous flux (lm)	3000
Luminaire efficacy (lm/W)	111
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Beam Angle (°)	110
Photobiological Risk Group	RG1
Total power consumption (W)	27

Start Flood IP65 PIR 3000LM 830 Black
0050176

Electrical protection	Class I
Control gear type	Not required
Dimmable	No
Housing colour	Black
IP rating	IP65
IK rating	IK05
Product EAN number	5410288501765
Warranty	3 years
Dimming method	N/A
Useful luminous flux (#use)	3000

Photometry

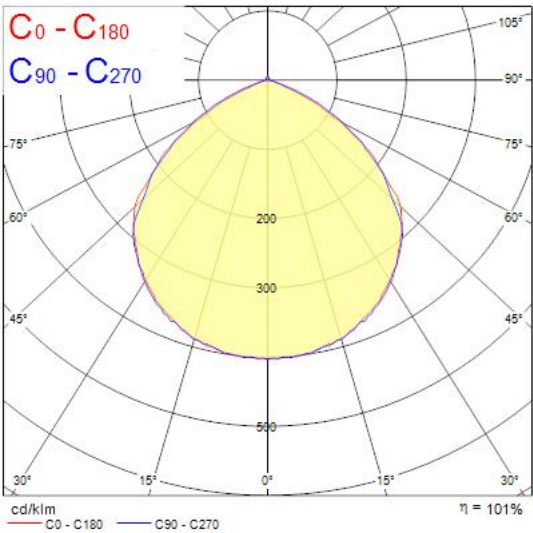

Technical drawings

