



Features

• Elegant glass LED filament lamp with tunable white, offering adjustable lighting for the perfect ambiance anytime, anywhere. Same size as traditional lamps, hassle-free upgrade to Smart energy-efficient LED lighting. Customise lighting from warm cosy to bright daylight (2000-6500K) to fit any mood or activity. Works effortlessly with SylSmart Home App, SylRemote, Amazon Alexa, Google Assistant and Siri Shortcuts for seamless control and convenience. Adjustable brightness from 1% to 100% with wireless dimming function for perfect illumination. Transform your space with diverse pre-set scenes for the perfect ambiance. Sparkling light effect.


Product Overview

Product name	ToLEDo Retro GLS 806LM TW SST
Technology	LED
Lamp shape	Pear-shape
Cap/Base	E27
Lamp finish	Other
Fixture rating	Open
General application	Hospitality, Residential & Consumer, Retail
ETIM Class	EC001959
E-number FI	4741191
Light colour	Homelight-Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG1
Wattage (W)	7
Power consumption (W)	7
Dimmable	Yes
IP rating	IP20
Product EAN number	5410288301020

ToLEDo Retro GLS 806LM TW SST
0030102

Warranty	3 years
Useful luminous flux (#use)	806

Technical drawings

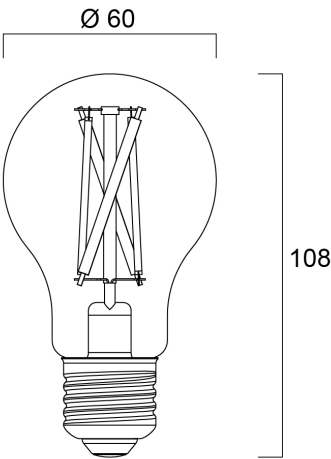

Data table

GENERAL DATA

Product name	ToLEDo Retro GLS 806LM TW SST
Technology	LED
Lamp shape	Pear-shape
Cap/Base	E27
Lamp finish	Other
Fixture rating	Open
General application	Hospitality, Residential & Consumer, Retail
Operating temperature range (°C)	-20°C...+40°C
ETIM Class	EC001959
E-number FI	4741191
Warranty	3 years

OPTICAL DATA

Useful luminous flux (#use)	806
-----------------------------	-----

ToLEDo Retro GLS 806LM TW SST 0030102

Light colour	Homelight-Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG1

ELECTRICAL DATA

Power consumption (W)	7
Wattage (W)	7
Equivalent watt (W)	60
Current (A)	0.051
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Control gear required	No
Dimmable	Yes
Inrush Current (A)	2.9
Inrush Duration (µs)	735
Lamp Energy Label (class)	E
Nominal Frequency (Hz)	50/60Hz

LIFETIME DATA

Lifespan L70 B50	15000
------------------	-------

PHYSICAL DATA

IP rating	IP20
Nominal Product Length (mm)	108
Nominal Product Diameter (mm)	60
Weight (kg)	0.038

PACKAGING

Product EAN number	5410288301020
Packaging single length / height (cm)	6.6
Packaging single width (cm)	6.6
Packaging single depth (cm)	12.0



ToLEDo Retro GLS 806LM TW SST
0030102

DUN14 (inner)	15410288301027
Units per outer package	6
Packaging outer length / height (cm)	20.6
Packaging outer width (cm)	13.9
Packaging outer depth (cm)	13.0


SAFETY DATA

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

Energy label



0030102

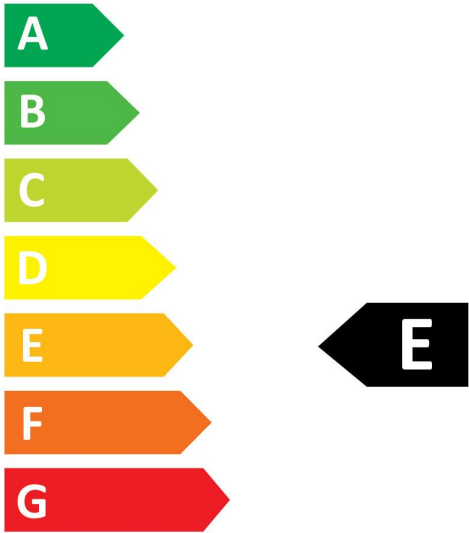


7 kWh/1000h



2019/2015



0030102

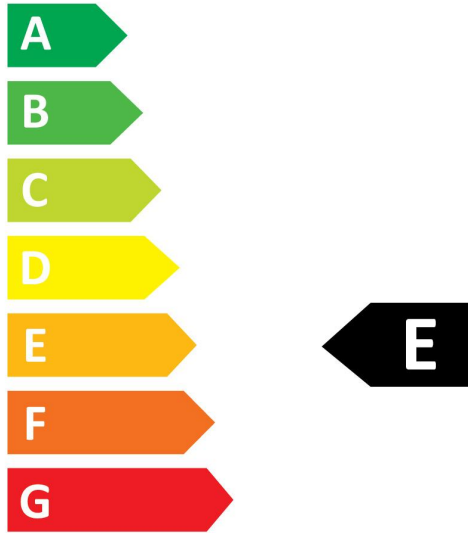

7 kWh/1000h



2019/2015