

Features


• START Panel is a range of backlit LED panels used in recessed ceilings. Ideal for general indoor applications such as corridors, breakrooms, offices and meeting rooms. Luminaire dimensions are compatible with common ceiling installation, and the shallow design makes it easy to install in low ceilings. Tp(b) rated diffuser that may not burn at a speed of more than 50mm per minute. 4000Lm; 36W; 111Lm/W; Drive current: 750mA; Average lifespan: 100.000Hrs; 4000K; CRI 80; Glare control <19; IK03; IP40 (from the front); SDCM<3; Class II; SylSmart Connected (SSA) enabled.



Product Overview

Cap/Base	N/A
Control gear type	LED driver constant current

Photometry

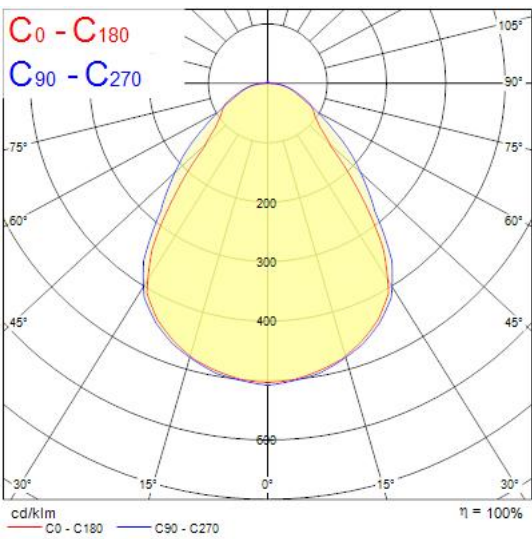

Technical drawings

