

Features

• QUADRO 1200x300 830 MP Unique stylish recessed modular LED luminaire, ideal for general indoor lighting applications such as breakout areas, offices and meeting rooms. Steel frame with integrated reflector, passive cooling. Low glaring UGR<16. RG1, 75° beam angle, optical system: white painted reflector with total internal reflection lenses. Light color temperature: 3000K (Warm White), max system power: 34W, max fixture output: 4500lm, efficacy at max output 132lm/W, max efficacy 140lm/W @ 15W, CRI (Ra) >80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), lifespan: 88,000 hours at 80% of the original output (L80B20), IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, low flicker, non-dimmable 8-step SELV Multipower driver (15W 2100lm, 18W 2500lm, 21W 2950lm, 24W 3300lm, 27W 3650lm, 30W 3950lm, 32W 4250lm, 34W 4500lm), electrical protection: Class II. Ingress protection IP40/IP20, suitable for indoor environment only. Nominal size: 1195x295mm, Loop in / loop out wiring, safety cables included, 18mm nominal height, RAL 9003 - Signal white color frame, weight: 3,40kg.


Product Overview

Product name	QUADRO 1200x300 830 MP
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting, Suspended
General application	Office, Education
ETIM Class	EC002892
E-number FI	4279455
Fixture luminous flux (lm)	4500


QUADRO 1200x300 830 MP
0044708

Luminaire efficacy (lm/W)	132
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	75
Glare control	< 16
Photobiological Risk Group	RG1
Total power consumption (W)	34
Electrical protection	Class II
Control gear type	Electronic ballast multiwatt
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9003
IP rating	IP40/20
IK rating	IK08
Product EAN number	5410288447087
Warranty	5 years
Dimming method	N/A

Photometry

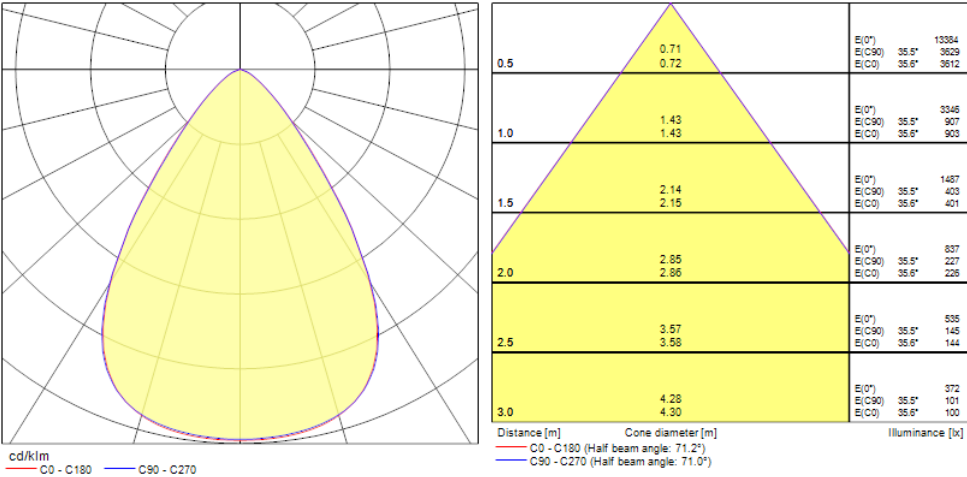

Technical drawings

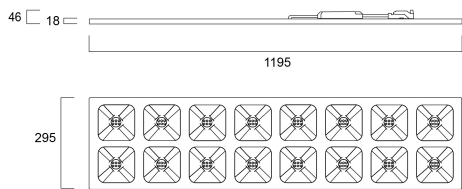

Data table

GENERAL DATA

Product name	QUADRO 1200x300 830 MP
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting, Suspended
General application	Office, Education
Operating temperature range (°C)	-10°C...+45°C
ETIM Class	EC002892
E-number FI	4279455
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	4500
Luminaire efficacy (lm/W)	132
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	75
Distribution type	Symmetric
Glare control	< 16

QUADRO 1200x300 830 MP 0044708

Photobiological Risk Group	RG1
----------------------------	-----

ELECTRICAL DATA

Total power consumption (W)	34
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) $\leq$ xx.x %	20
Electrical protection	Class II
Control gear required	No
Control gear type	Electronic ballast multiwatt
No. Of switching cycles before premature failures	>25000
Dimmable	No
Dimming method	N/A
Drive current (mA)	900
Inrush Current (A)	25
Inrush Duration (μ s)	200
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	34
Max. products per 13A C Breaker	42
Max. products per 16A C Breaker	56
Max. products per 20A C Breaker	66
Max. products per 10A B Breaker	20
Max. products per 13A B Breaker	26
Max. products per 16A B Breaker	33
Max. products per 20A B Breaker	41
Connectable conductor cross section - Max (mm ²)	1.5

LIFETIME DATA

QUADRO 1200x300 830 MP 0044708

Lifespan L70 B50	100000
Lifespan L80 B20	88000

PHYSICAL DATA

Housing colour	RAL9003
IP rating	IP40/20
IK rating	IK08
Diffuser finish	Other
Diffuser material	None
Nominal Product Length (mm)	1195
Nominal Product Width (mm)	295
Nominal Product Height (mm)	18
Weight (kg)	3.717

PACKAGING

Product EAN number	5410288447087
Packaging single length / height (cm)	120.0
Packaging single width (cm)	3.1
Packaging single depth (cm)	36.0
DUN14 (inner)	15410288447084
Units per outer package	4
Packaging outer length / height (cm)	121.5
Packaging outer width (cm)	14.5
Packaging outer depth (cm)	38.0

SAFETY DATA

Glow Wire Test (°C)	650
Optimal operating condition (°C)	-10-45
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No