


AREUM SUSPENDED 1500 D/I 4000K SSC WHITE
0042977

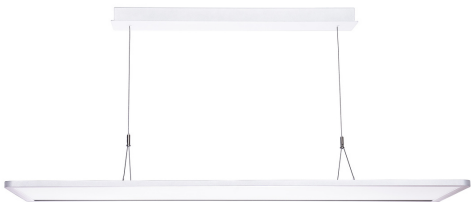

Features

• AREUM SUSPENDED 1500 D/I 4000K SSC WHITE is a highly efficient suspended LED luminaire with 70% direct and 30% indirect light distribution. Ultra thin (17mm) aluminium body with rounded edges. Length 1500mm, width 300mm. White RAL9016 powder coated luminaire body, powder coated steel surface gearbox and Y-shape power feeded suspension cables. SylSmart Standalone capable. Luminous flux: 7000lm, Power consumption: 57W. Luminaire efficacy: 123lm/W. CRI (Ra)>80 4000K (Neutral White) LED, chromaticity tolerance: SDCM<3. Lifespan: L80B10 57,000h. UGR<19, Luminance at 65°<3000 cd/m2. Photobiological safety risk group 0. Electrical protection: Class I. Glow Wire Test 650°C.


Product Overview

Product name	AREUM SUSPENDED 1500 D/I 4000K SSC WHITE
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium, Steel
Mount	Suspended
General application	Office
ETIM Class	EC001743
Fixture luminous flux (lm)	7000
Luminaire efficacy (lm/W)	125
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	84
Glare control	< 19

AREUM SUSPENDED 1500 D/I 4000K SSC WHITE
0042977

Photobiological Risk Group	RG0
Total power consumption (W)	56
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Housing colour	RAL9016
IP rating	IP20
IK rating	IK03
Product EAN number	5410288429779
Warranty	5 years
Dimming method	SylSmart SSC

Photometry

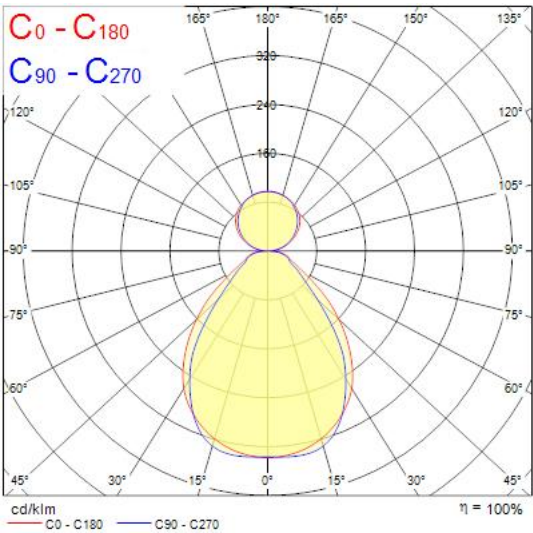

Technical drawings

