

AREUM SUSPENDED 1200 D/I 4000K WHITE
0042952



Features


• AREUM SUSPENDED 1200 D/I 4000K WHITE is a highly efficient suspended LED luminaire with 70% direct and 30% indirect light distribution. Ultra thin (17mm) aluminium body with rounded edges. Length 1200mm, width 300mm. White RAL9016 powder coated luminaire body, powder coated steel surface gearbox and Y-shape power feeded suspension cables. Low flicker (<5%) Constant Current driver. Luminous flux: 5150lm, Power consumption: 40W. Luminaire efficacy: 129lm/W. CRi (Ra)>80 4000K (Neutral White) LED, chromaticity tolerance: SDCM<3. Lifespan: L80B10 57,000h. UGR<19, Luminance at 65°<3000 cd/m2. Photobiological safety risk group 0. Electrical protection: Class I. Glow Wire Test 650°C.

Product Overview

Cap/Base	N/A
Control gear type	LED driver constant current

AREUM SUSPENDED 1200 D/I 4000K WHITE
0042952

Photometry

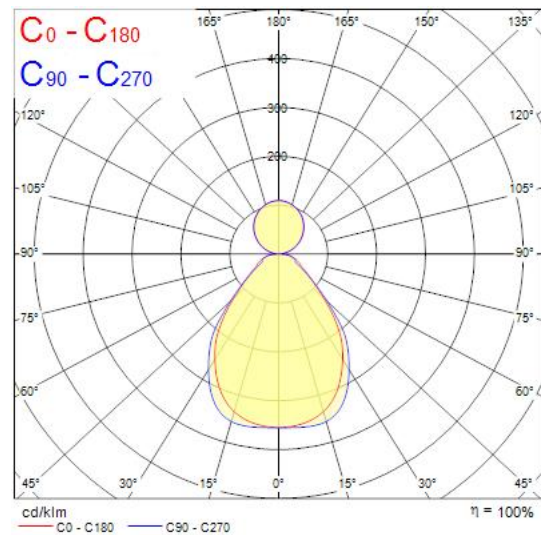

Technical drawings

